

▶ **SM11**
User Manual

Thank you for purchasing this product.

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.



Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Safety And Performance Notice

Do not substitute or use any other power supply other than the enclosed unit, or a Blustream approved replacement.

Do not disassemble Blustream hardware for any reason. Doing so will void the manufacturer's warranty.

Contents

Introduction	03
Features	03
Panel Descriptions	04
EDID Control	05
Mode DIP Switch Settings	06
Schematic Diagram - Embedding	07
Schematic Diagram - De-embedding	08
Specifications	09
Package Contents	09
Maintenance	09
Installer notes	10


Introduction

Our SM11 HDMI Signal Manager has been designed to help solve HDMI compatibility, HDCP2.2, clock stretching, EDID and handshaking issues that are becoming common problems when distributing HDMI signals. The SM11 also features de-embedding or embedding audio within the HDMI signal path, allowing you to breakout up to 7.1 channel audio signals. The SM11 supports full HDMI 2.0 and HDCP 2.2 with video resolutions up to and including 4K @ 60Hz 4:4:4.

FEATURES:

- Can help to solve most HDMI, EDID, HDCP, compatibility, and handshaking issues
- Supports full HDMI 2.0 specification 4K UHD video (4K @ 60Hz 4:4:4)
- HDCP 2.2 compliant
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
- Supports all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission (HDMI pass through)
- Embed stereo analogue (L/R) audio using 3.5mm stereo jack input in place of source audio onto the HDMI output signal path
- HDMI audio extracted to both analogue L/R audio and coaxial digital outputs concurrently
- Extract audio with or without a connected display - acts as an end-sink
- Supports HDR (High Dynamic Range) pass through
- Supports 3D signal display
- Advanced EDID management


Front Panel

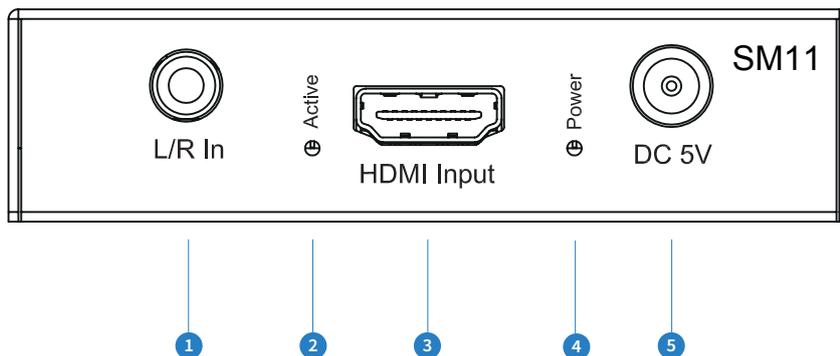

- ① L/R analogue audio input - 3.5mm stereo jack
- ② HDMI input indicator LED - lit when connected to a source
- ③ HDMI input - connect to a HDMI source
- ④ Power indicator LED - lit when unit is powered on
- ⑤ Power port - use supplied 5V 1A DC adaptor



Rear Panel

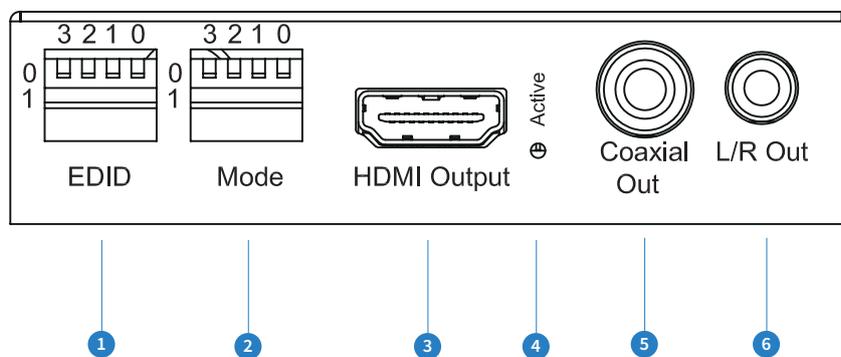

- ① EDID DIP switch (UP=0, DOWN=1) - see page 5 for further details
- ② Mode DIP switch - see page 5 for further details
- ③ HDMI output - connect to a HDMI display (unless using as an audio breakout only product)
- ④ HDMI link status LED - lit when connected to a HDMI display
- ⑤ Coaxial digital audio output (RCA)
- ⑥ Left/Right analogue audio output. De-embedded audio from the HDMI signal input. Note - source input must be PCM 2ch audio for analogue audio outputs to work. The SM11 does not down-mix multi-channel audio signals.

EDID Control

EDID (Extended Display Identification Data) is a data structure that is used between a display and a source. This data is used by the source to find out what audio and video resolutions are supported by the display, from this information the source will discover what the best audio and video resolutions need to be outputted.


While the objective of EDID is to make connecting a digital display to a source a simple plug and play procedure, issues do arise when multiple displays or video matrix switching is introduced because of the increased number of variables.

By pre-determining the video resolution and audio format of the source and display device you can reduce the time needed for EDID hand shaking thus making switching quicker and more reliable.

Configuration of extender EDID settings can be achieved using the product dip-switches on the end panel of the SM11.


Note: You must power cycle the product after making EDID changes. For some sources it may be necessary to power cycle the source after EDID changes have been made for the source to update its video & audio output settings.

Global EDID Settings

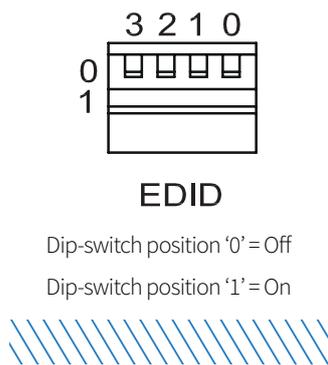

DIP ON ▼/OFF ▲ SWITCHING POSITIONS				EDID TYPE
3	2	1	0	
OFF	OFF	OFF	ON	1080p / 2ch
OFF	OFF	ON	OFF	1080p / 5.1ch
OFF	OFF	ON	ON	1080p / 7.1ch
OFF	ON	OFF	OFF	1080i / 2ch
OFF	ON	OFF	ON	1080i / 5.1ch
OFF	ON	ON	OFF	1080i / 7.1ch
OFF	ON	ON	ON	4K@60Hz 4:2:0 / 2ch
ON	OFF	OFF	OFF	4K@60Hz 4:2:0 / 5.1ch
ON	OFF	OFF	ON	4K@60Hz 4:2:0 / 7.1ch
ON	OFF	ON	OFF	4K / 2ch
ON	OFF	ON	ON	4K / 5.1ch
ON	ON	OFF	OFF	4K / 7.1ch
ON	ON	OFF	ON	DVI 1280x1024
ON	ON	ON	OFF	DVI 1920x1080
ON	ON	ON	ON	DVI 1920x1200
OFF	OFF	OFF	OFF	Copy sink EDID

Mode DIP Switch Settings



Mode

The SM11 can be configured to perform various tasks using the MODE dip-switches. For details on each setting please see below:

Note: You must power cycle the product after making MODE changes.

Dip-switch 3 - Hotplug detect ON / OFF

When Hotplug detect is turned OFF the SM11 will use the HPD of the connected display on the HDMI output.

When Hotplug detect is turned ON the SM11 will complete the HPD back to the source connected to the HDMI input, no longer requiring a HPD from a connected display.

Turning on HPD in the SM11 can be beneficial in 2 ways:-

- 1) Audio de-embedding is required but no display is available. The SM11 will act as the HDMI end-point completing the necessary HDMI handshake, allowing the HDMI source to output a signal.
- 2) The SM11 will act as the HDMI end-point completing the necessary HDMI handshake which can help resolve any handshake issues that may be associated with the display connected to the HDMI output of the SM11.

Position = 0 (up) - HPD (hot plug detect) off

Position = 1 (down) - HPD on

Dip-switch 2 - Audio embedding and de-embedding

The SM11 can be used to de-embed or embed audio to and from the HDMI signal.

Position = 0 (up) - audio de-embedding (audio extracted from the HDMI signal input)

Note - Source input must be PCM 2ch audio for analogue audio outputs to work. The SM11 does not down-mix multi-channel audio signals

Position = 1 (down) - audio embedding (2CH L/R audio input added to the HDMI video out)

Dip-switch 1 - HDCP bypass or conversion


The SM11 can be used to help resolve HDCP issues.

Position = 0 (up) - HDCP management mode

Position = 1 (down) - HDCP bypass

Dip-switch 0:



Reserved / not in use - leave in '0' position

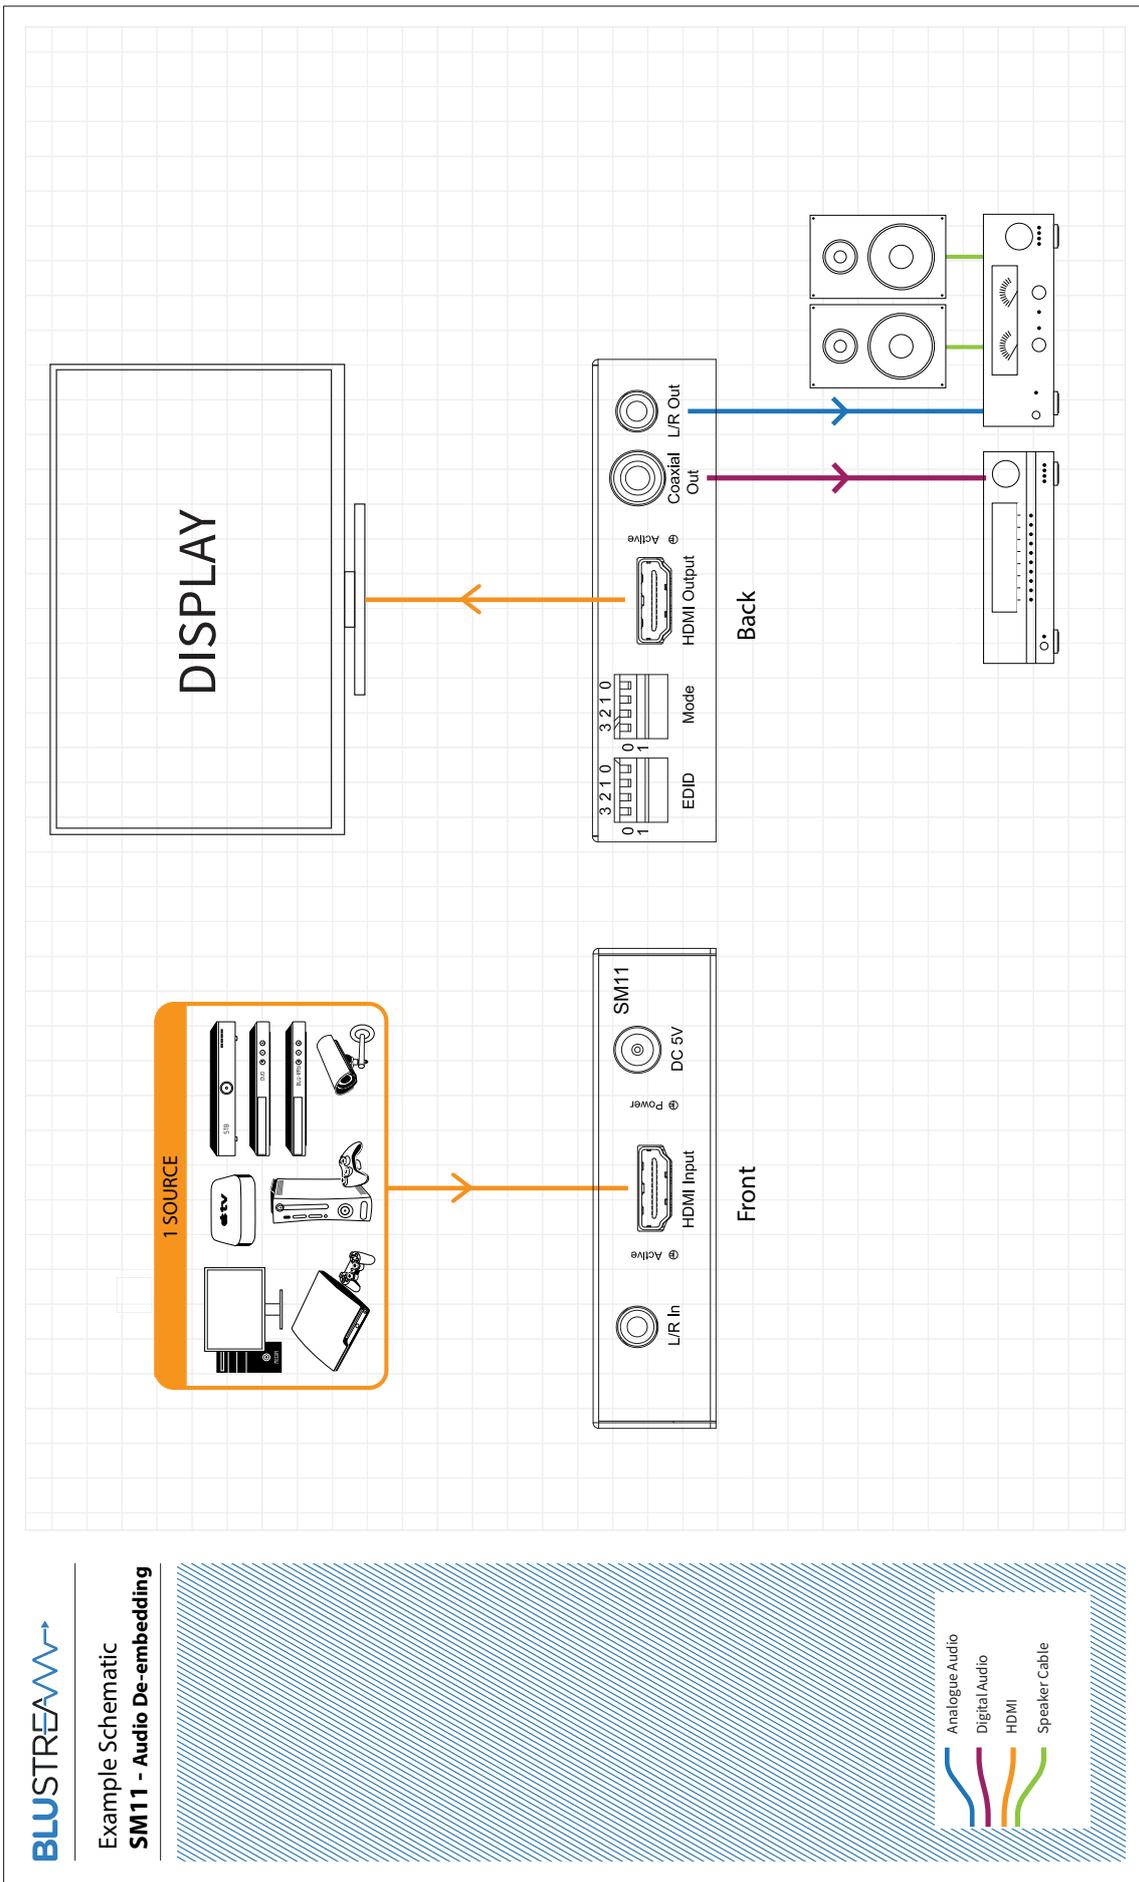

BLUSTREAM

Example Schematic
SM11 - Audio De-embedding

Example Schematic
SM11 - Audio Embedding

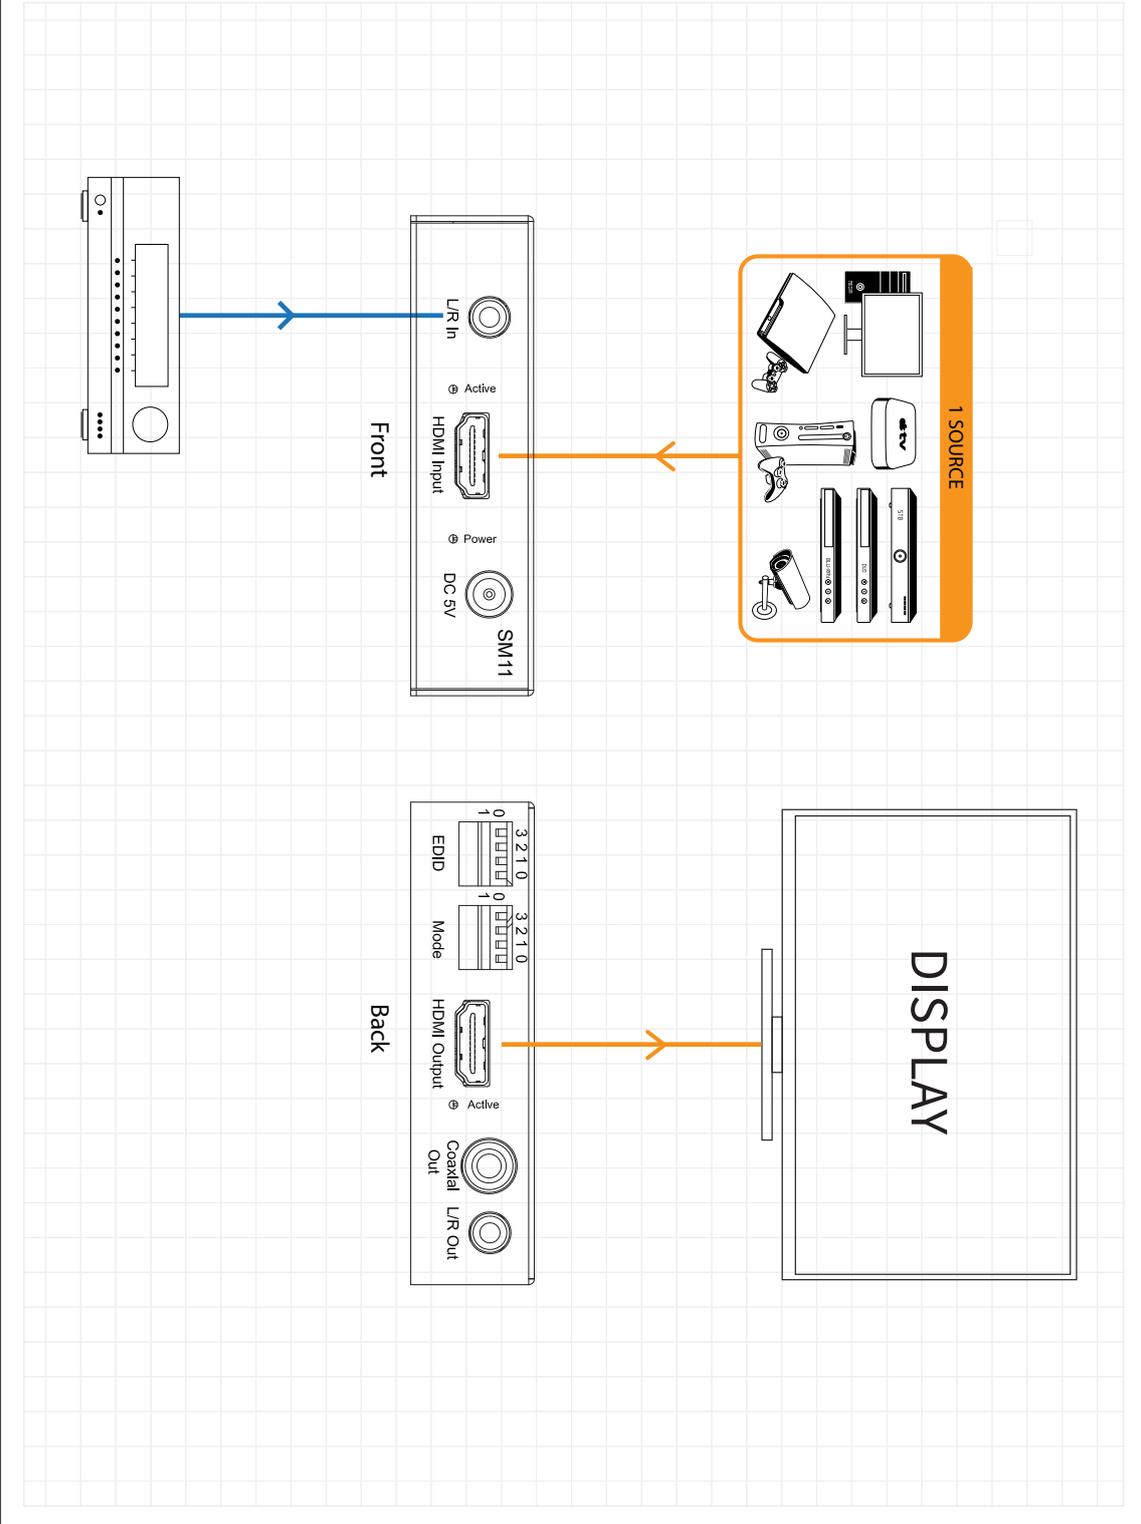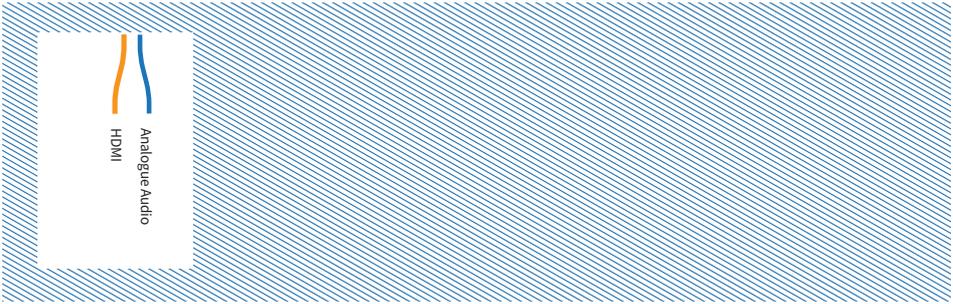

Specifications

- Audio input connector: 1x analogue left/right audio (3.5mm stereo jack)
 - Audio output connectors: 1x RCA (SPDIF) & 1x analogue left/right audio (3.5mm stereo jack)
 - Video input connector: 1x HDMI Type A, 19-pin, female
 - Video output connector: 1x HDMI Type A, 19-pin, female
 - Mounting kit included
 - Dimensions excl. connections (W x D x H): 105mm x 87mm x 23mm
 - Shipping weight: 0.5 kg
 - Power: 5V / 1A DC, screw type connector
 - Operating Temperature: 32°F to 104°F (0°C to 40°C)
 - Storage Temperature: -4°F to 140°F (-20°C to 60°C)
-

Package Contents

- 1 x SM11
 - 1 x 5V / 1A DC power supply
 - 1 x Mounting kit
 - 1 x User manual
-

Maintenance

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.

Components inside this unit are not user serviceable. Do not remove the protective cover from the unit. Removing any panel from this product will invalidate the manufacturers warranty.

Installer notes:



www.blustream.co.uk
www.blustream.com.au