

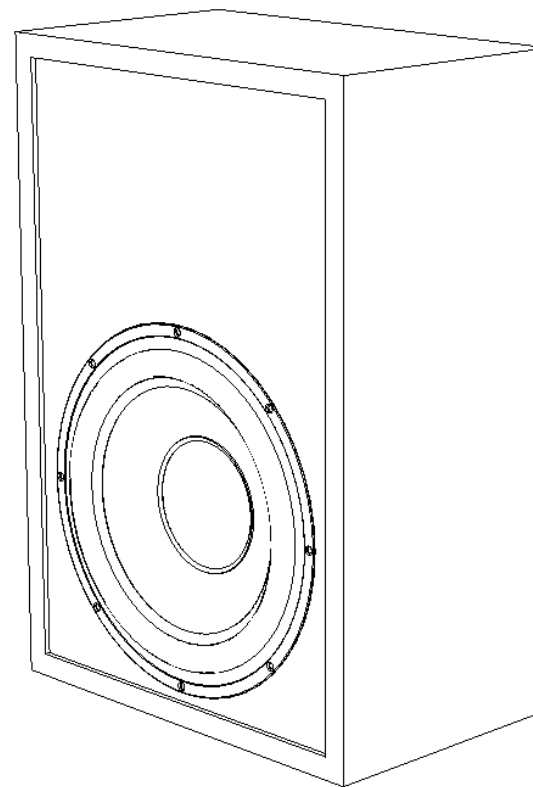


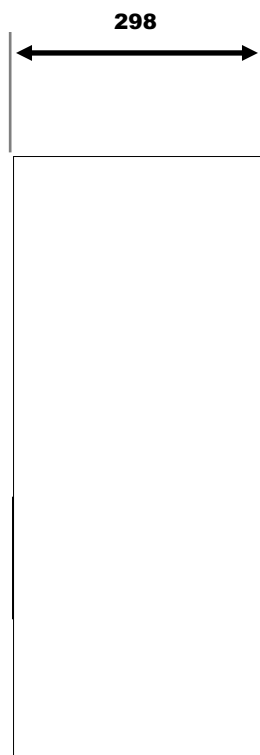

C15S Custom Installation Sub

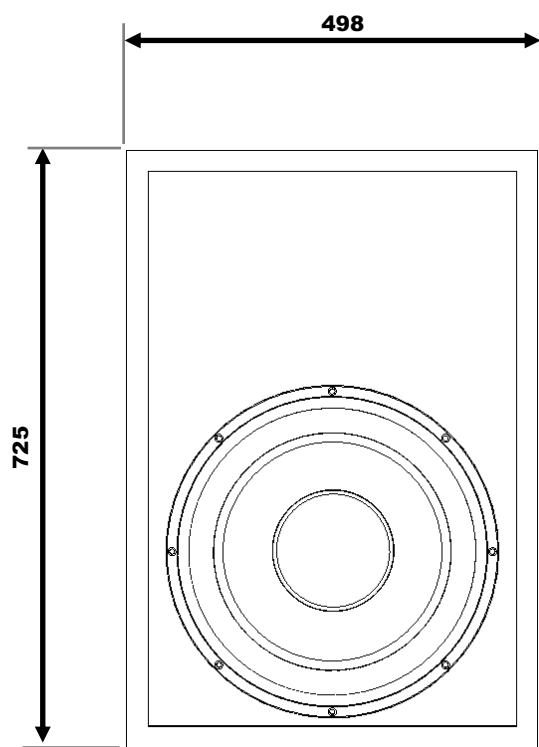

C15S Sub

V10
MAX SOUND

C15S Custom Installation Sub – Specification

C15S		
Specifications	Values	Notes / Comments
Nominal System Impedance	4 ohm	(Z-min 3.4 ohm)
Frequency Response	22-200 Hz	(average response in room +/- 3 dB)
Frequency Roll Off	20 Hz	(-6 dB 20 Hz near field)
Crossover Frequency	Variable	60-200Hz (VA500Blue)
Tweeter	NA	NA
Woofer	1 x 15"	Ultra-Stiff Paper Pulp with fiberglass dustcap
Power Handling	800 watt	Long term IEC-268-5 (cycled input 77-20K Hz)
Power Handling	500 watt	Rated IEC-268-5 (constant input 77-20K Hz)
Recommended Amp Power		VA500 Blue
Sensitivity	91dB	Drive Signal 100mV VA500 Blue Input
Max SPL Continued	118 dB	Sinewave 40-200Hz / THD < 10%
Max SPL Peak	121 dB	Sinewave 40-200Hz / THD < 10%
System Principle		Sealed Full 1'' MDF enclosure
Connection	Terminal Gold plating	Screw terminal 6mm Cable
Finish	Paint	Black Vinyl
Cutout	H x W	NA
Cabinet dimensions	H x W	28.54 x 19.60 inch / 725 x 498 mm
Cabinet depth	D	11.73 inch / 298 mm
Dimensions Grille	H x W x D	NA
Weight	Netto	71.6 lbs / 32.5 kg
Accessories		2 x "Brass Brace" Rigid Bracket, 2 x Stacking Couple Straight Brackets, 4 x Rubber Feet, 4 x Foam Protectors





C15S Custom Installation Sub

The **Miller and Kreisel C15S** sub delivers uncompromising bass in an unapologetic package. Utilizing an ultra-linear 15" high excursion woofer designed to deliver the lowest frequencies, in a vibration isolating enclosure constructed of 25mm MDF. Intended for behind the screen installations this subwoofer still manages all of this in an enclosure no deeper than the S150. Includes brackets for surface and wall mounting for additional vibration isolation.



Impedance	4 Ohm
Bass Driver	15" Ultra stiff paper Pulp with fiberglass dustcap
Frequency Response	22-200Hz +/- 3dB
Sensitivity	91dB / 1m
Dimensions	725 x 498 x 298mm (S150 Depth)
Cabinet	Solid 1" MDF w/Full Center Brace
Finish	Black Vinyl with logo
Accessories	Mounting Brackets, rubber feet, foam protectors

VA500 Blue Edition

Packaged with the C15S is this dedicated Class D amplifier with high efficiency, cool running and low standby voltage consumption is a further development of the amplifiers built into the popular Miller & Kreisel V Series subwoofers. The Class D switch mode power module is designed with effective power reserves to effortlessly deliver copious amounts of clean power to the **C15S** sub for extraordinary, uncompromising handling of demanding deep bass transients.



Amplifier Power	500W RMS / 800W Peak
System Preamp	Analog
THD	<0.5% @ 500W
AC Power	100-240 VAC 50/60Hz
Inputs	Line Level RCA L/R
Outputs	Line Level RCA L/R
EQ Switch	3-Position Room Adaptation
1. Center of Wall	
2. Near a Corner	
3. Placed in a Corner	
Controls	Volume, Phase, Crossover





C15S Sub




C15S Custom Installation Sub – Accessories


Standard Inserts Mounted on All
4 Faces for Installation Flexibility

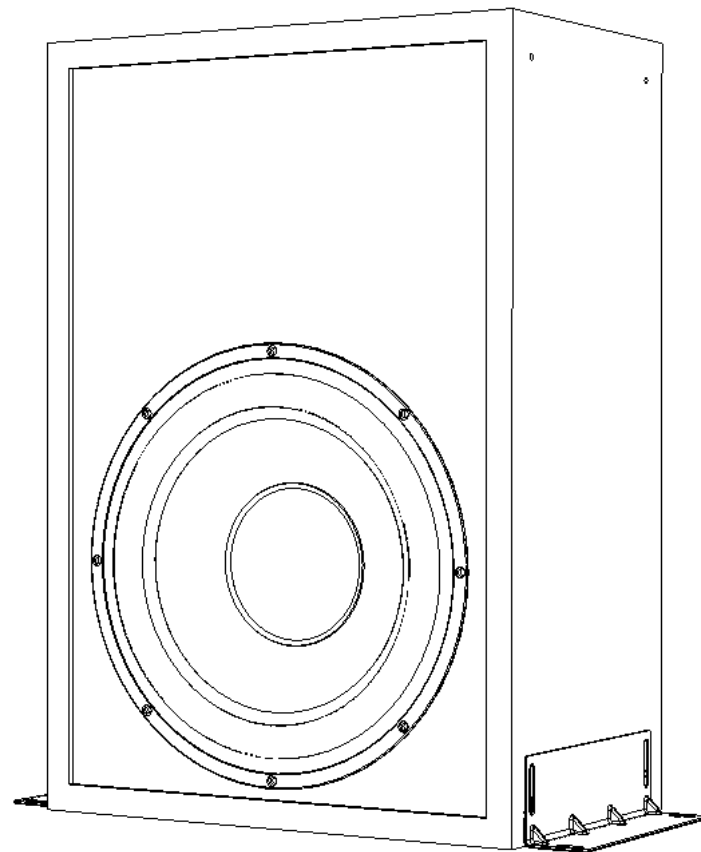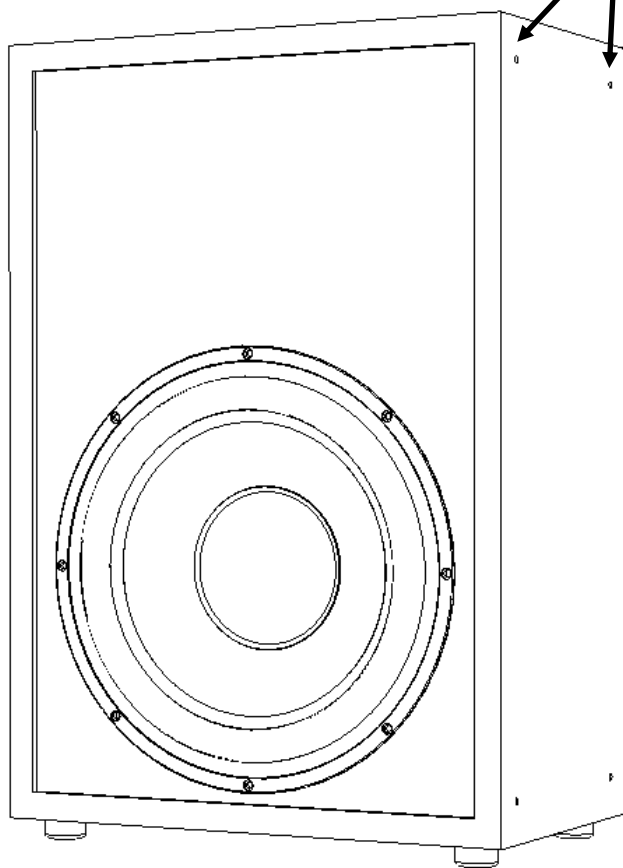

Rubber Feet x 4
Vertical or Horizontal



Bass Brace x 2
Vertical or Horizontal
Tightens Bass
Secures Subwoofer in
Place



Stacking Coupler x 2
Enables Subwoofer
Stacking for Multi-Sub
Installation




Foam Protectors x 4
Used Between Subs
for Stacking or Against
Hard Surfaces to
Protect and Absorb
Vibration

C15S Sub

V10
MAX SOUND

C15S Custom Installation Sub – Accessories

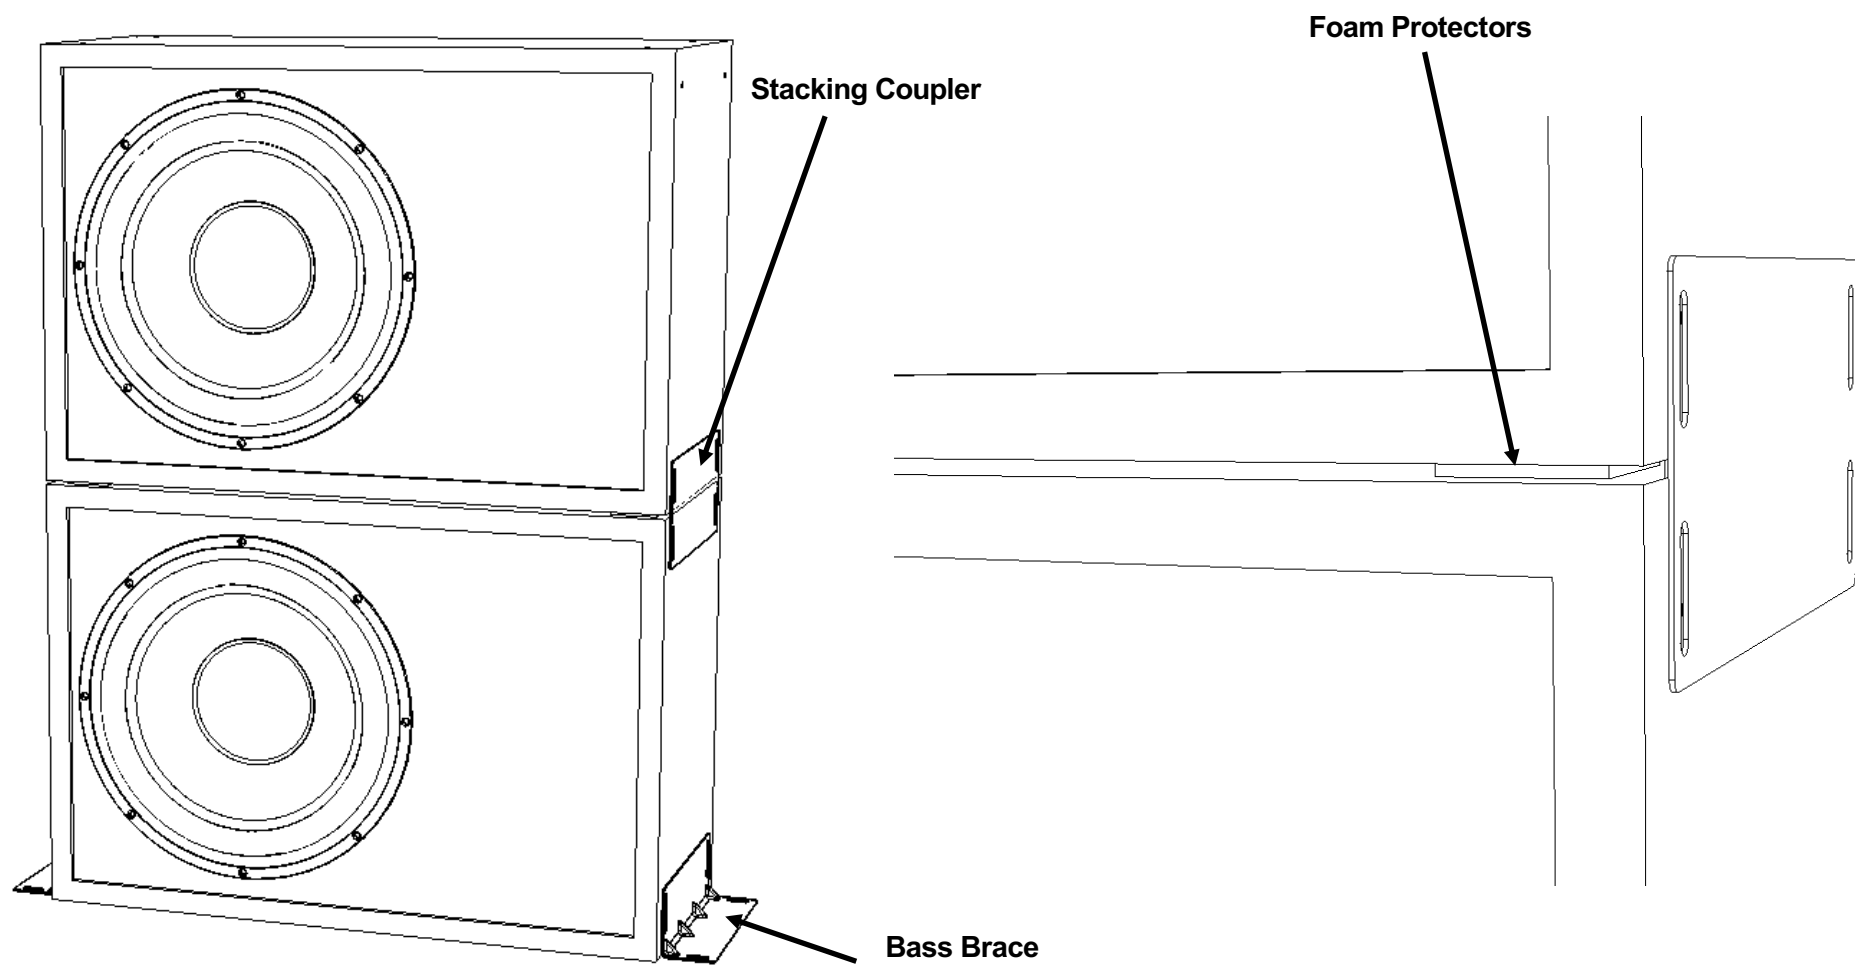

C15S Sub

V10
MAX SOUND



C15S sub



C15S sub





C15S sub

V10
MAX SOUND

