


HD11AU

HDMI Audio Embedder / De-Embedder

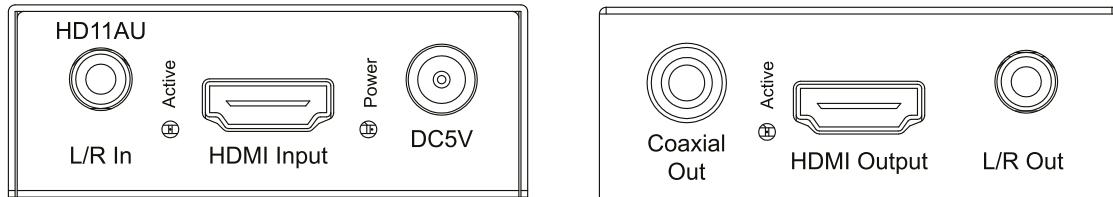

Description

Our HD11AU is the perfect solution for either de-embedding or embedding audio within the HDMI signal path. This solution allows you to breakout up to 7.1 audio signals. Connect the HD11AU between your source and display via HDMI, then select the whether de-embedding or embedding audio is required.



Specifications

Supports 4K UHD video (3840 x 2160 @30Hz 4:4:4, 4096 x 2160 @24Hz 4:4:4, and 4K @60Hz 4:2:0)

Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K

Can be configured to work both as an HDMI audio de-embedder or audio embedder

HDMI audio de-embedded to associated output analogue L/R audio and Coaxial digital outputs

Advanced EDID management

Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission

Supports 3D signal display