




Example Schematic
HMXL88ARC

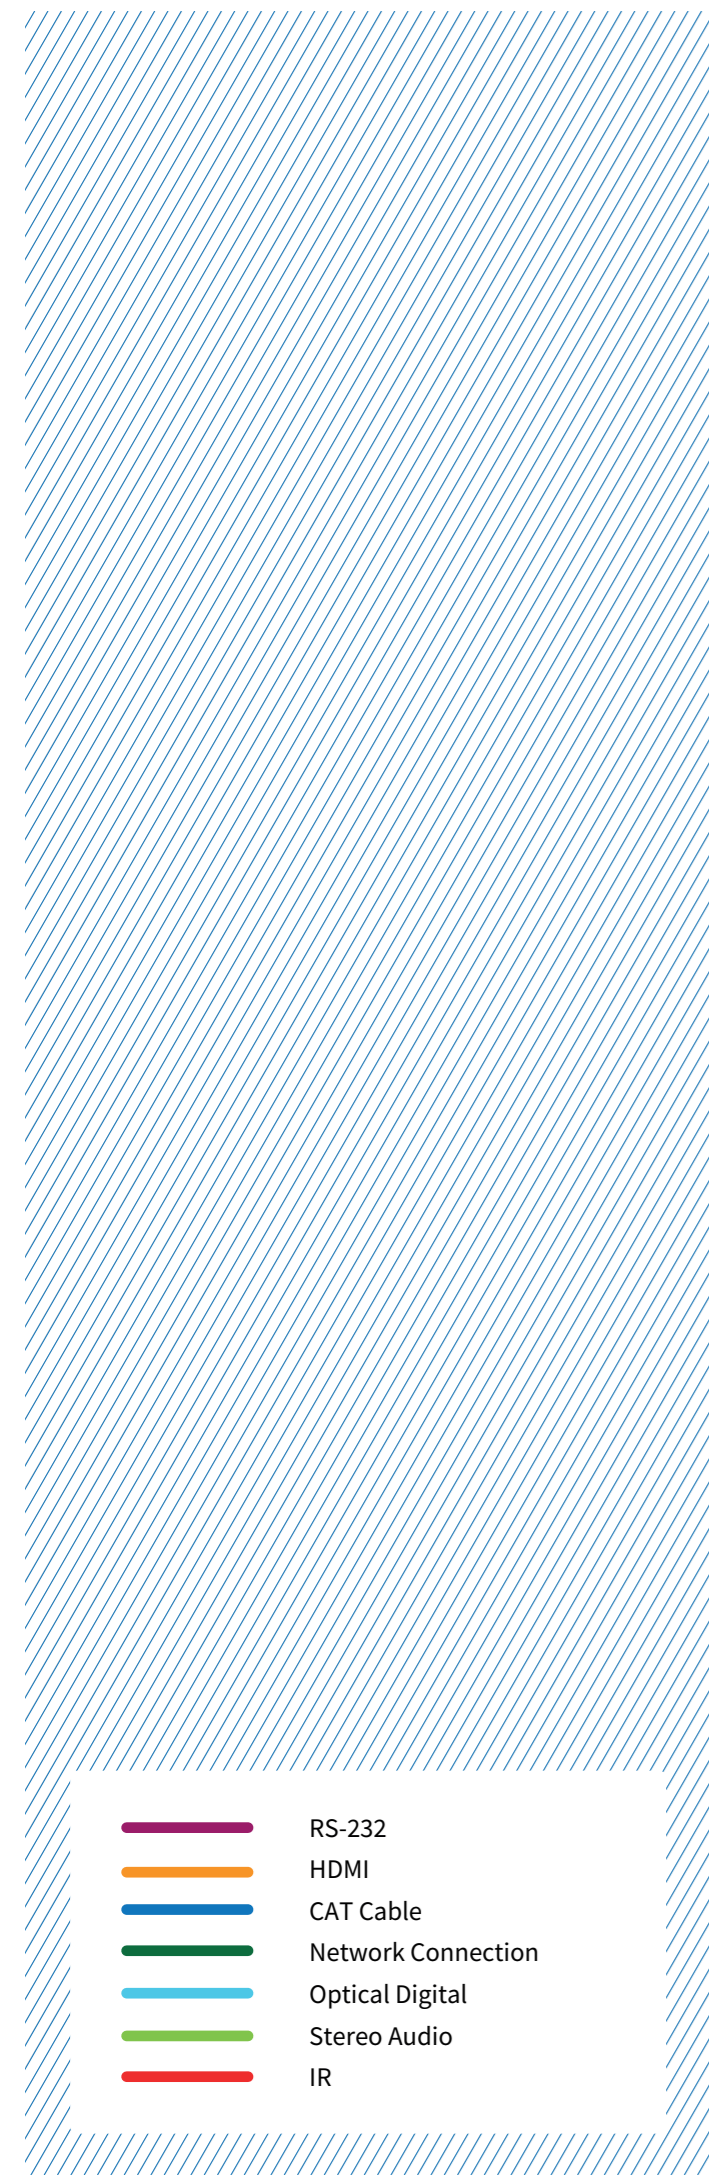

- RS-232
- HDMI
- CAT Cable
- Network Connection
- Optical Digital
- Stereo Audio
- IR

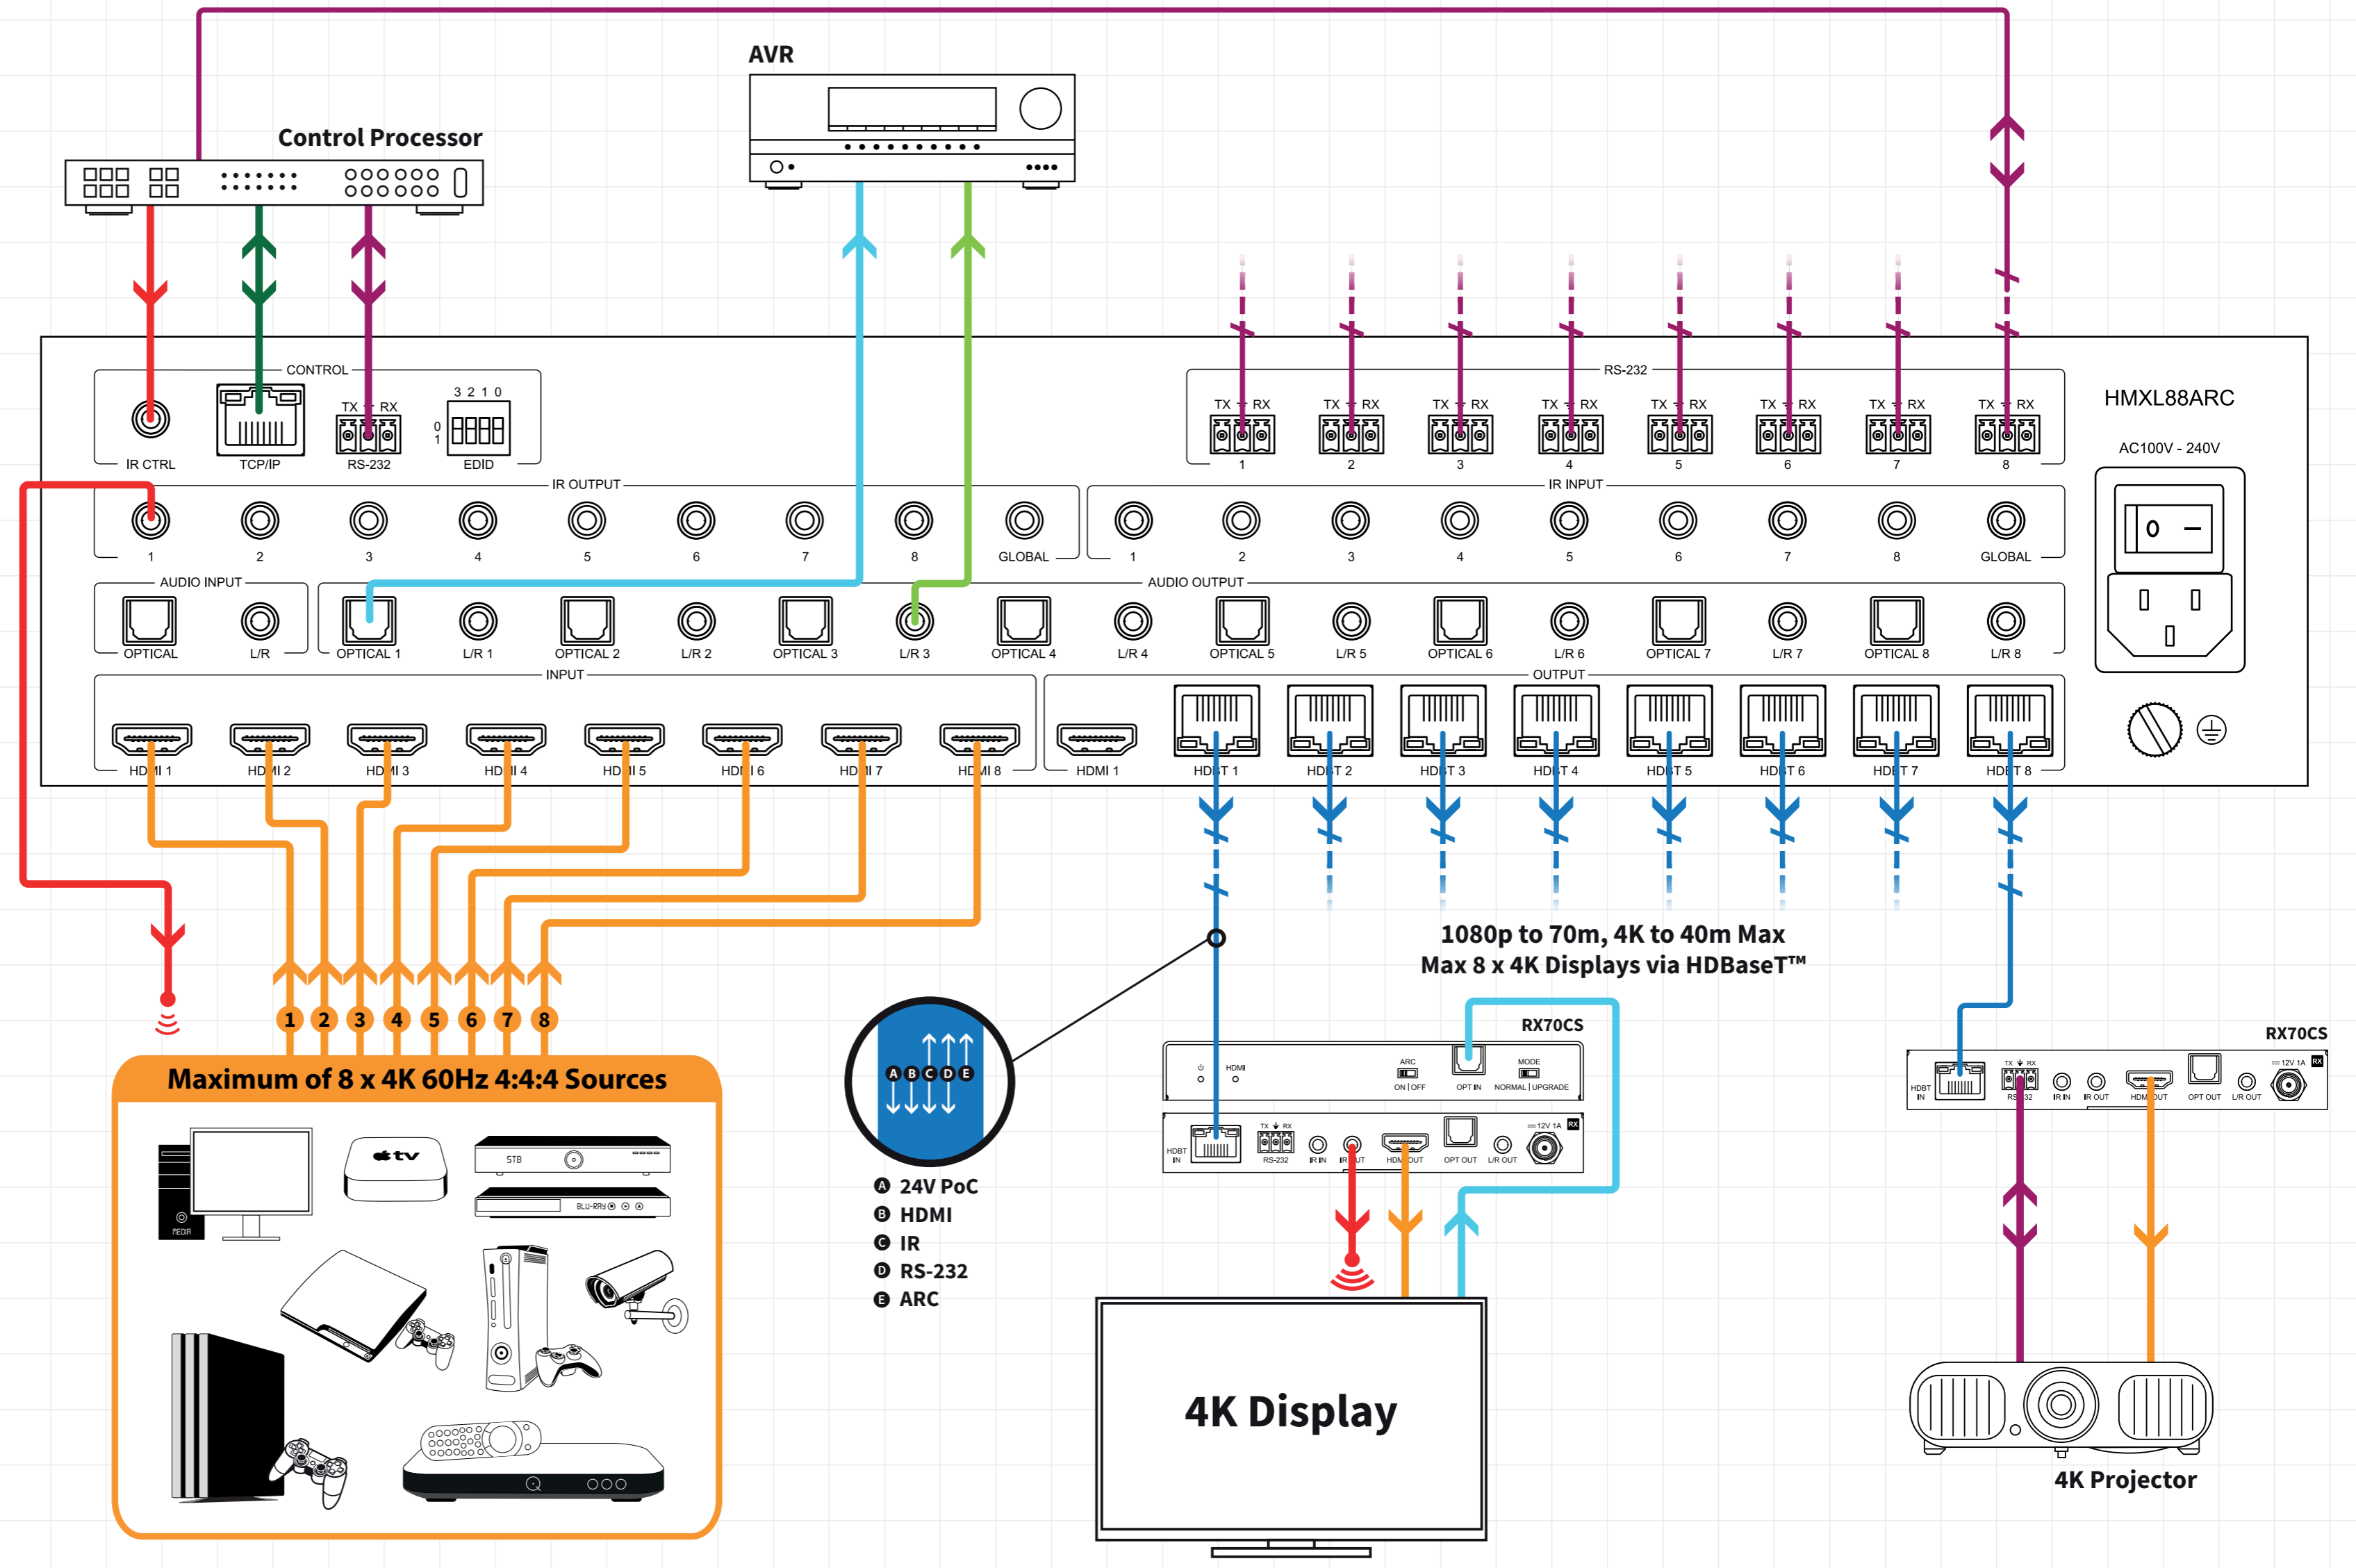

Maximum of 8 x 4K 60Hz 4:4:4 Sources

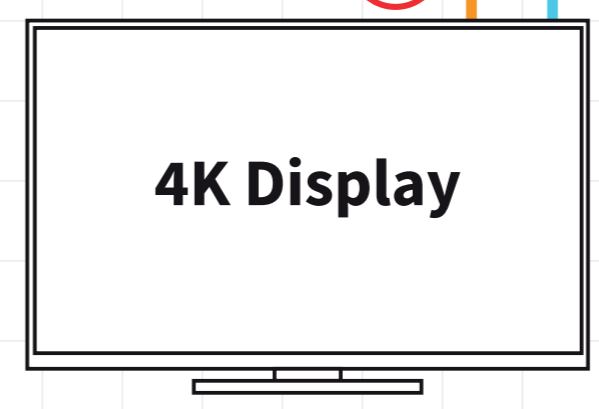

RX70CS

4K Projector

For 24V PoC, HDMI ARC and Optical Audio Return functionality, the RX70CS HDBaseT™ receiver must be used.