

GS6 6" Passive / Active 4 Ω Subwoofer

The GS6 is a 6" passive subwoofer designed for indoor applications in permanent installations for retail shops, restaurants, hotels, bars and residential spaces.

Designed to match our GF22 and GF82 loudspeakers as a low frequency extension device, the GS6 features a symmetrical load circuit that allows to be connected directly to most standard loudspeakers such as the GF series.

The GS6A active subwoofer is equipped with an on-board amplifier to easily drive any speaker from the GF family without the need of an external amplifier module.

GS6 and GSA, thanks to a built-in low-pass filter, do not require any additional EQ or DSP and can be connected to the same line as the satellites with no hassle!



Frequent Applications	
Retail	Cafes, Bistros & Restaurants
Hotels & Resorts	Fitness & Wellness

General	
Type	Passive subwoofer
Transducers	6" ferrite woofer
Frequency Response	50 Hz - 140 kHz (-10 dB)
Max SPL ¹	108 dB (peak)
Power Handling	120 W
Nominal Impedance	4 Ω
Coverage	OMNI

Suggested amplifiers	
GA201	up to 4 pcs/ch @ 8Ω





Handling & Finishes	
Dimensions (WxHxD)	170 x 310 x 310 mm (6,7 x 12,2 x 12,2 in)
Weight	3,2 kg (7 lb)
Material	Birch Plywood
Color	Black

¹ Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m.

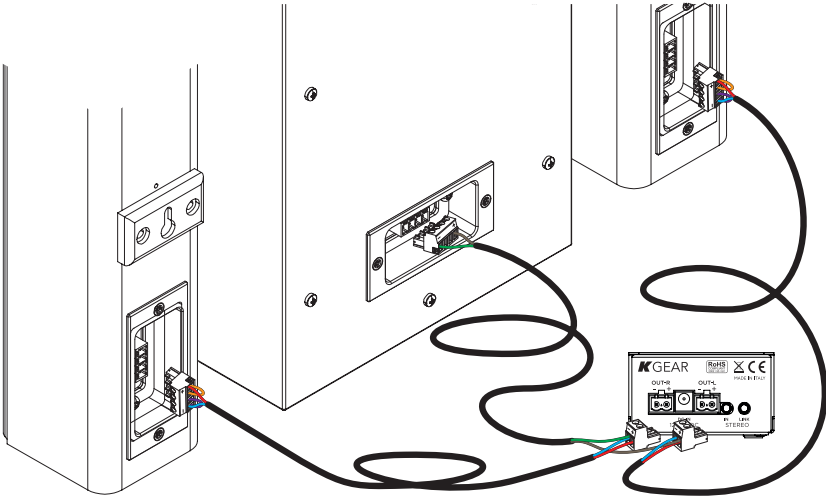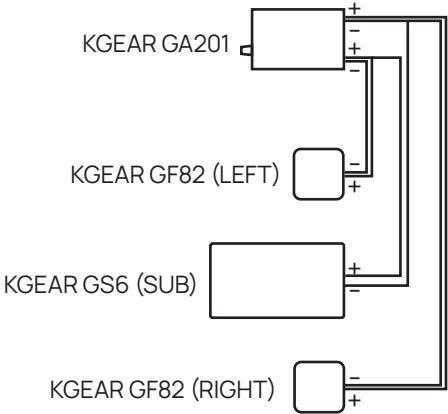

Mechanical Drawings

GS6

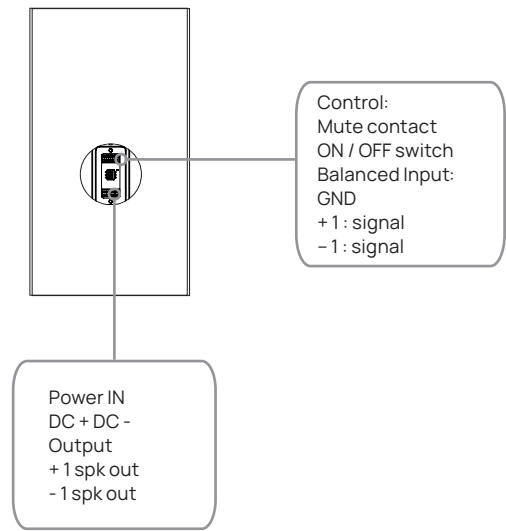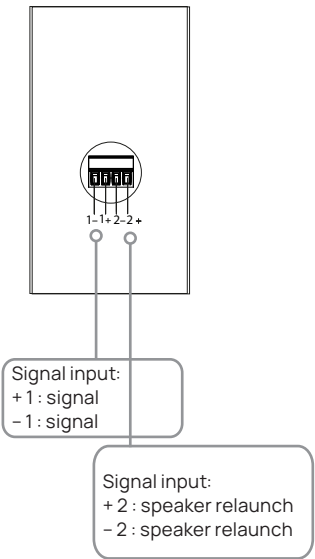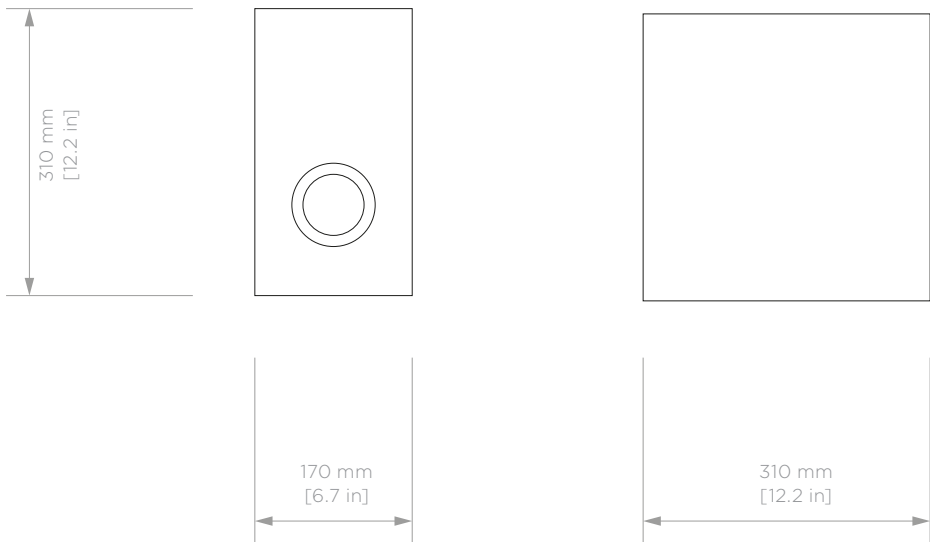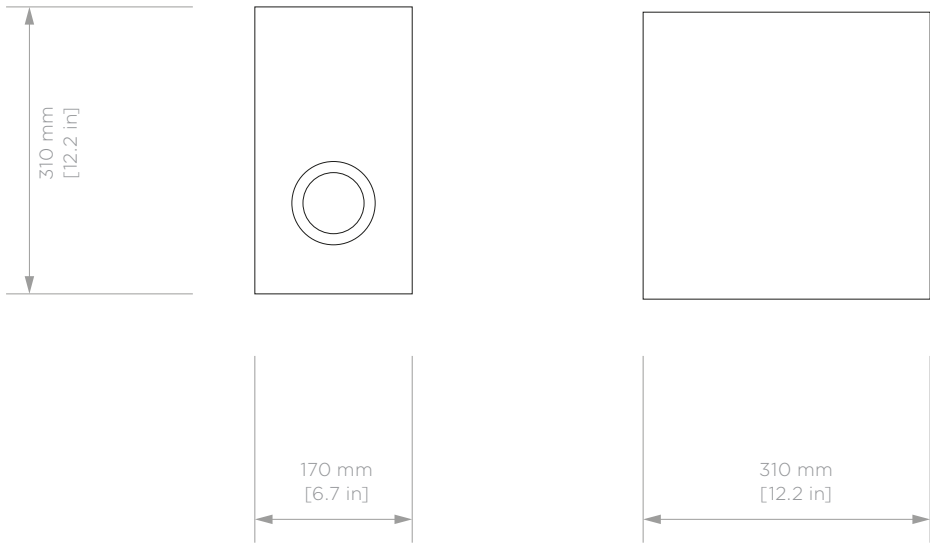

GS6A - wiring

