

Highlights:

- In depth adjustable
- Stores up to 12 units of 19" Equipment
- Punched square holes for use with snap-in cage nuts
- Loading capacity of 100 Kg
- 2.5 mm thick cold rolled steel frame
- Easy assembly in 10 minutes
- Floor standing & wall mounted use
- Unrestricted air flow due to open-frame design
- Stand alone & in-furniture integration
- Ships as flat-down package

Product information:

The OPR312A is an in depth adjustable professional and solid constructed open-frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards which is suitable for wall mounted or floor standing installation. It ensures maximum installation, connectivity and maintenance ease storing up to 12 units of 19" equipment.

The open-frame rack has an adjustable depth of 300 to 450 mm for easy installation and fitment in existing furniture. The rugged construction made of 2 mm thick steel allows pre-loading of the equipment before transportation to the installation site. Finishing is done in a black (RAL9004) powder coating with fine structure while punched equipment mounting profiles on front and both sides offer a multifunctional use of the cabinet. Delivered in a flat-down package, the simple structure allows assembly by a single person in a record-breaking time.





Product Features:

Unit height	12 HE
Max. usable depth	300 ~ 450 mm
Max. load standing	100 kg
Max. load hanging	50 kg
Dimensions	520 x 558 x 300~450 mm (W x H x D) (excl. rubber feet)
Colours	Black (RAL9004)

Shipping & Ordering:

Accessories	Included	
		4 x Leveling feet
		4 x M8 expanding wall bolt
		24 x Cage nuts + screws

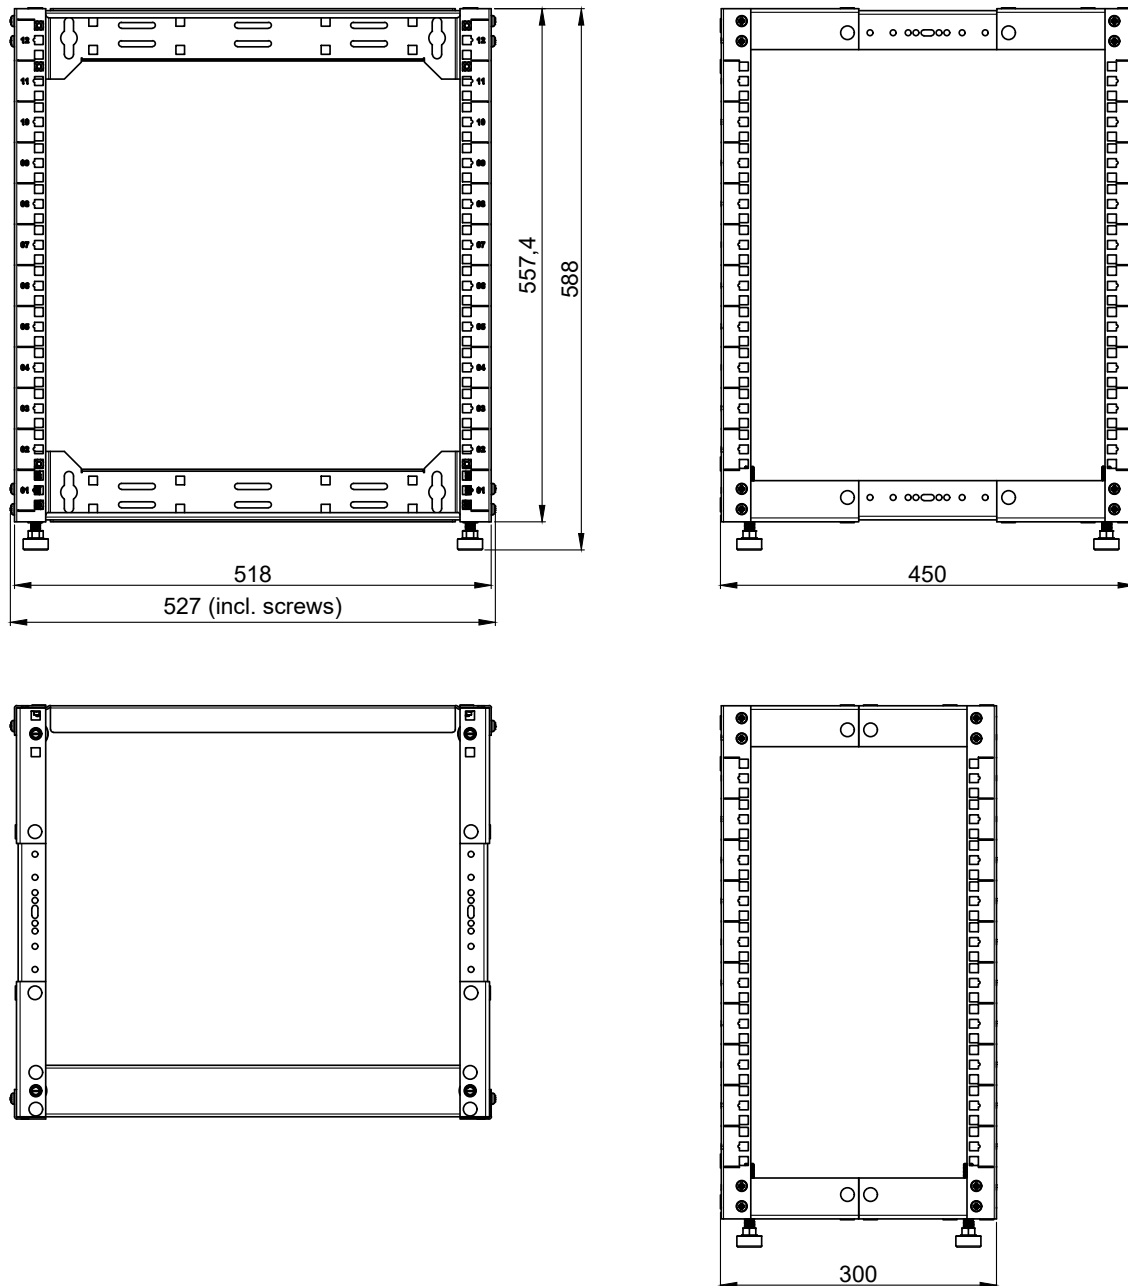

	OPR312A		Product description: 19" OPEN FRAME RACK - 12 UNIT - 300-450MM	
	Weight: TBA	Outer dimensions: (w x h x d) 527 x 588 x 450	Unit height: 12 HE	