



VEXO112A

12" high performance 2-way active loudspeaker

Highlights:

- Compatible with AUDAC Touch™
- Dante™ expansion port
- Advanced DSP and loudspeaker management
- DuraCoat™ texture paintwork
- High sound pressure levels with tight driver response
- Compatible with TouchLink™
- Ball impact resistance
- Horizontal and vertical mounting
- User friendly mounting
- -90° to +35° inclination
- WaveDynamics™ supported

Product information:

The VEXO series are compact high performance 2-way active loudspeakers and come in 3 different models, each of them with different sizes and performances meeting the requirements of every application. The VEXO series loudspeakers consist of active and passive versions. The low-frequency transducer, which is made out of high-quality materials, is combined with a 1.7" voice coil compression driver, enabling high sound pressure levels and a tight driver response with a rotatable 90° x 70° coverage pattern for a wide range of applications.


Thanks to the unique driver composition, the VEXO112 delivers a clear and natural sound with an RMS power of 400 Watts and a maximum power of 1600 Watt. The frequency response ($\pm 3\text{dB}$) starts from 58Hz up to 20 kHz and the sensitivity (1W/1m) reaches 99 dB while a maximum continuous sound pressure level from 125 dB can be achieved.

The construction of the cabinets is made of 12mm plywood with a polyurethane coating, making them resistant to any impact. The front side of the cabinet is finished with a powder-coated steel grill with acoustical foam. A recessed carry handle on the rear side makes carrying easy. Positioning and suspension of the speaker are easily achieved by using the standard 35 mm pole adapter on the bottom and the M10 rigging points. Two speaker connectors provide reliable connections with easy link-through to cabinets.

The optional Clever U bracket allows mounting the high power 2-way cabinet both horizontally and vertically. An inclination of -90° to +35° ensures an optimal positioning. The optional MBK bracket even allows mounting the VEXO series to the ceiling which gives the opportunity to install the loudspeaker cleanly in any environment.

By installing the optional ANI44XT Dante™ audio network interface in the active loudspeaker, the VEXO series can be integrated into any Dante enabled AV network and transfer digital audio with any compatible solution on the market.

The VEXO112A features the unique WaveDynamics™ innovation. Due to this DSP processor, the audio control and processing technology enable any user to effortlessly control the



Certification:

most advanced acoustic configurations. The integrated DSP allows pre-sets for full-range, satellite and custom configurations and can be loaded via the USB slot on the back of the device. By installing the optional ANI44XT Dante audio network interface in the loudspeaker, the VEXO series can be integrated into any Dante™ enabled AV network and transfer digital audio with any compatible solution on the market.

Impedance:



Applications:

- Education
- Sport facilities
- Clubs
- Concert venues

System specifications:

| | | | |
|----------------------------|-------------------|---|---|
| Speaker type | | | 2-way |
| Max. Power | | | 1600 W |
| RMS Power | | | 400 W |
| Impedance | | | 8 Ω |
| Sensitivity (1W/1m) | | | 99 dB |
| Sound Pressure (Max. W/1m) | | | 125 dB |
| Frequency | Response (± 3 dB) | 58 Hz - 20 kHz | |
| Dispersion | Horizontal | 90° | |
| | Vertical | 70° | |
| Crossover | Type | Passive built-in | |
| Drivers | HF | Compression driver with 1.7" VC and 1" throat | |
| | LF | 12" (2.5" VC) | |
| Connectors | Remote control | RJ45 | |
| | Input | 2 x Combo XLR / 6.3 mm jack | |
| | | | 3-pin Euro Terminal Block (Pitch - 3.81 mm) |
| | | | 3-Pin terminal block (linkthrough) |
| | | | XLR male (linkthrough) |
| Inputs | | | USB port |
| | | | RJ45 (Ethernet) |
| Power | Consumption | Standby | 3.2 W |
| | | Idle | 22.5 W |

Product Features:


| | | |
|---------------------|-------------------|--|
| Dimensions | | 369 x 610 x 390 mm (W x H x D) |
| Weight | | 23.5 kg |
| Finish | Cabinet finishing | Polyurethane coating |
| Front finish | | Powder coated steel grill with acoustical foam |
| Mounting & handling | Rigging points | 10 x M10 |
| Construction | | 12 mm high-quality plywood |
| Mounting & handling | Stand fitting | 35 mm pole adapter on bottom |
| | Carry handles | On top |
| Powerdrive mount | | Powerdrive type 100 (127 x 70 mm) |
| Colours | | Black & White |
| Accessories | Optional | ANI44XT - Dante™ audio network interface |

Variants:


- VEXO112A/B - Black version
- VEXO112A/W - White version

Acoustical data graphs:


Horizontal Polars:

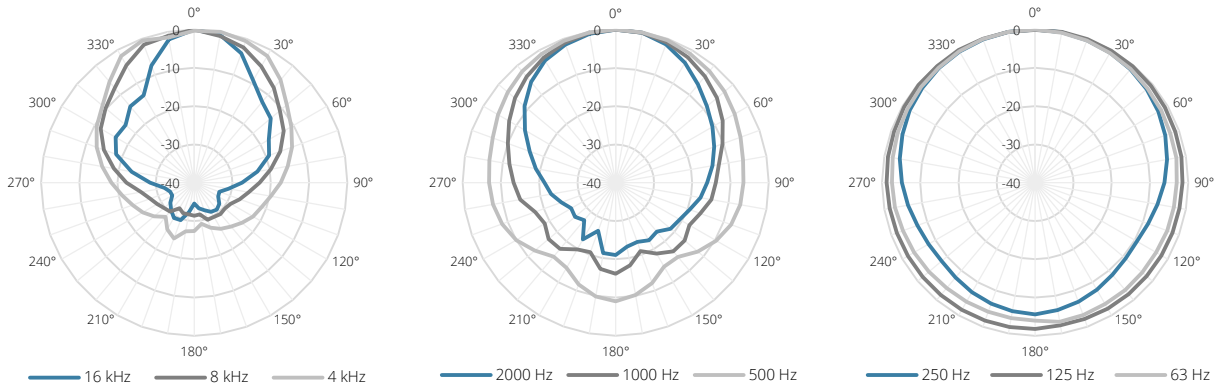


Vertical Polars:

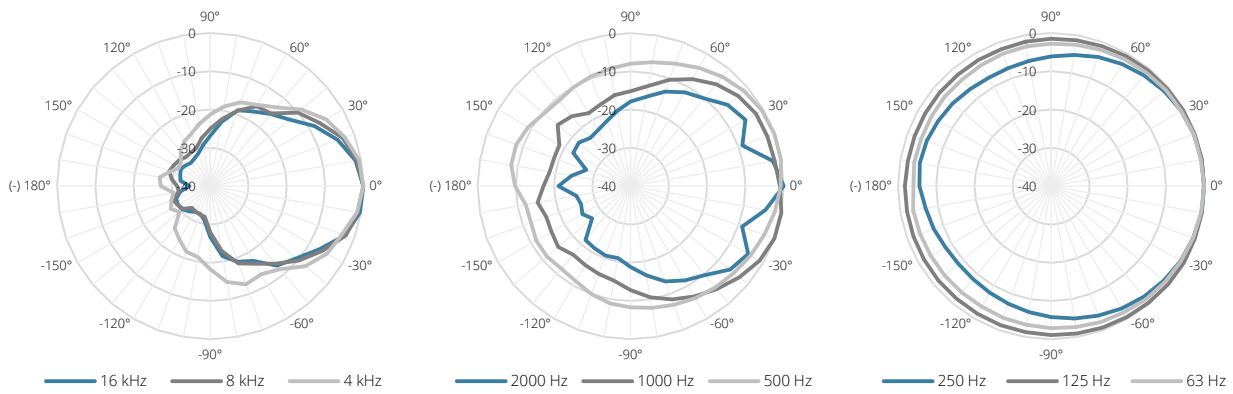


Sensitivity:

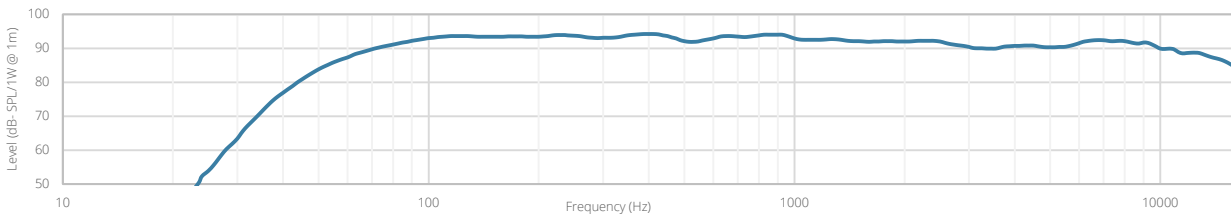


Beamwidth (-3dB):

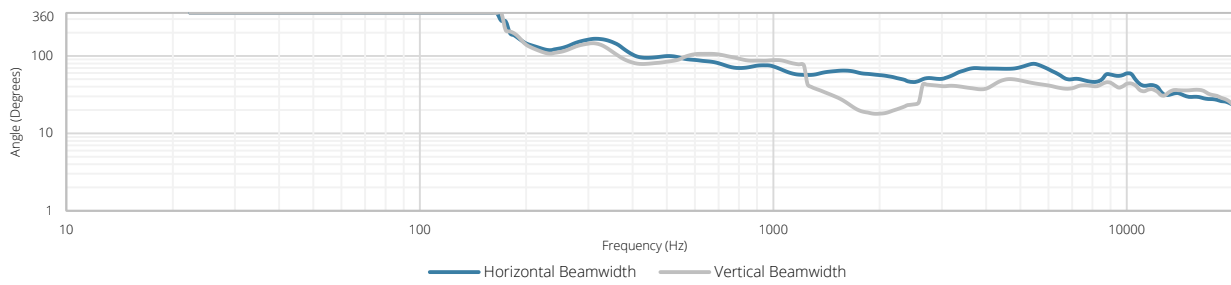

Directivity index:

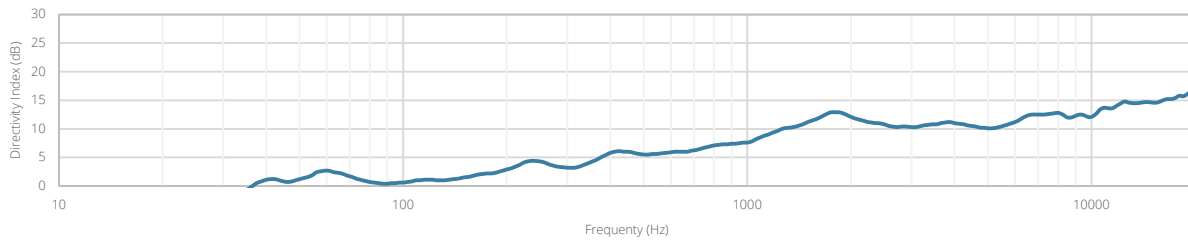

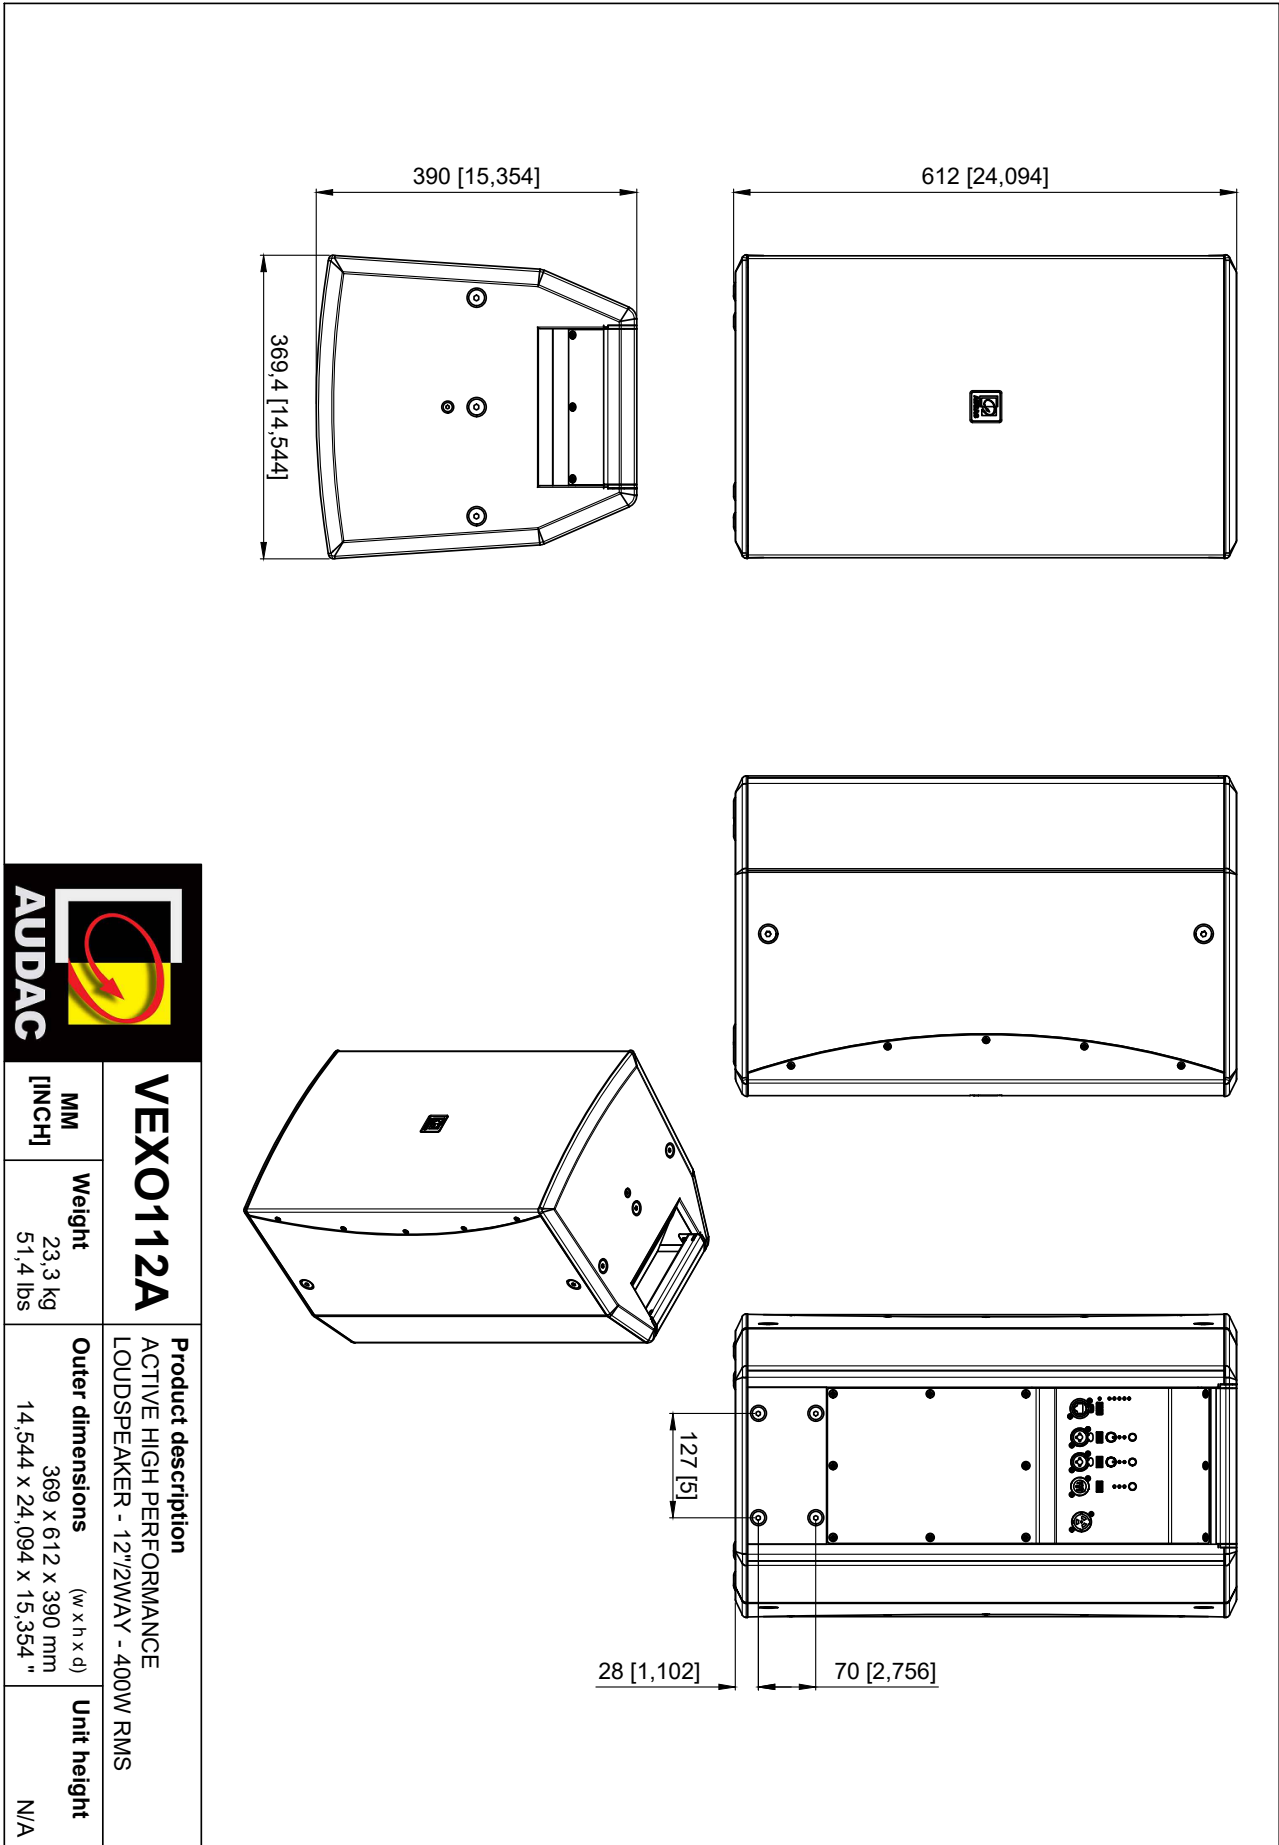

| | | |
|------------------|---------------------|--|
| VEXO112A | | Product description ACTIVE HIGH PERFORMANCE LOUDSPEAKER - 12"12WAY - 400W RMS |
| MM [INCH] | Weight | Outer dimensions (w x h x d) |
| | 23,3 kg 51,4 lbs | 369 x 612 x 390 mm 14,544 x 24,094 x 15,354 " |
| | | Unit height N/A |