



MTX88

8-zone audio matrix

The MTX88 is the eight-zone version of the MTX series, containing two balanced microphone inputs with priority function, phantom power possibility and three-band tone control. Four stereo line-level inputs are provided where to any line-level music source such as a CD-player, Tuner or MP3 player, ... can be connected. The other two inputs of the matrix are the additional wall panel inputs for both line and microphone signals. The MTX can be controlled by means of additional control panels, its fully functional web based interface or the iPhone/ iPad Remote app. The RS232 port makes the MTX compatible with any home & industrial automation systems supporting RS232. The front panel of the MTX shows a rotary button per zone with indication LEDs for accessing controls and settings. A built-in PFL loudspeaker makes it possible to pre-listen every channel without the need for a headphone. The balanced line-level zone output connections are performed using 3-pin Euro-terminal block connectors, each of them accompanied with an RJ45 connector for connecting additional wall panels for that zone. A 24 volts power connection makes it possible to keep the MTX running on emergency power, even if the main power is shut down.

Applications:


- Hotels
- Public facilities
- Corporate spaces
- Residential
- Houses of worship
- Clubs, bars, restaurants



Additional Inputs:



Additional Voltage:



System specifications:

Inputs	Balanced Microphone	Type	2 x Balanced Microphone	
		Connector	XLR	
		Sensitivity (1W/1m)	0 dBV ~ -50 dBV	
		Phantom Power	15 V DC	
		Signal / Noise	> 80 dB	
		THD+N (@ 1 kHz)	< 0.05 dB	
		EQ	High	± 15 dB (12.5 kHz)
			Mid	± 15 dB (2.5 kHz)
			Low	± 15 dB (80 Hz)
		Unbalanced Stereo	Type	4 x Stereo Unbalanced Line
		Connector	RCA	
		Sensitivity (1W/1m)	-14 dB ~ +9 dB	
		Signal / Noise	> 100 dB	
		THD+N (@ 1 kHz)	< 0.01 dB	
		Wall Panel	Type	8 x Wall panel input
			Connector	RJ45
		Other	Type	1 x Priority mute contact
Outputs			Type	8 x Stereo Balanced Line
			Connector	3-pin Euro Terminal Block (Pitch - 3.81 mm)
		Impedance	51 Ω	
		Level	-70 dB ~ 0 dB	
		EQ	Treble	± 14 dB (2.5~20 kHz)
			Bass	± 14 dB (100 Hz)
	Frequency	Response (± 3 dB)		20 Hz - 20 kHz
		Crosstalk (@ 1 kHz)		-85 dB
	Control			Front panel
				RS-232
			TCP/IP (RJ45)	
			Wall panel (RS-485)	
			Audac Touch™	
			Web (HTML5)	
			Web (Flash)	
Power	Consumption		12 W	

Supply

100 ~ 240 V AC / 50 ~ 60 Hz



24 V DC (emergency Power)

Product Features:

Dimensions 482 x 88 x 335 mm (W x H x D)

Weight 4.840 kg

Unit height 2 HE

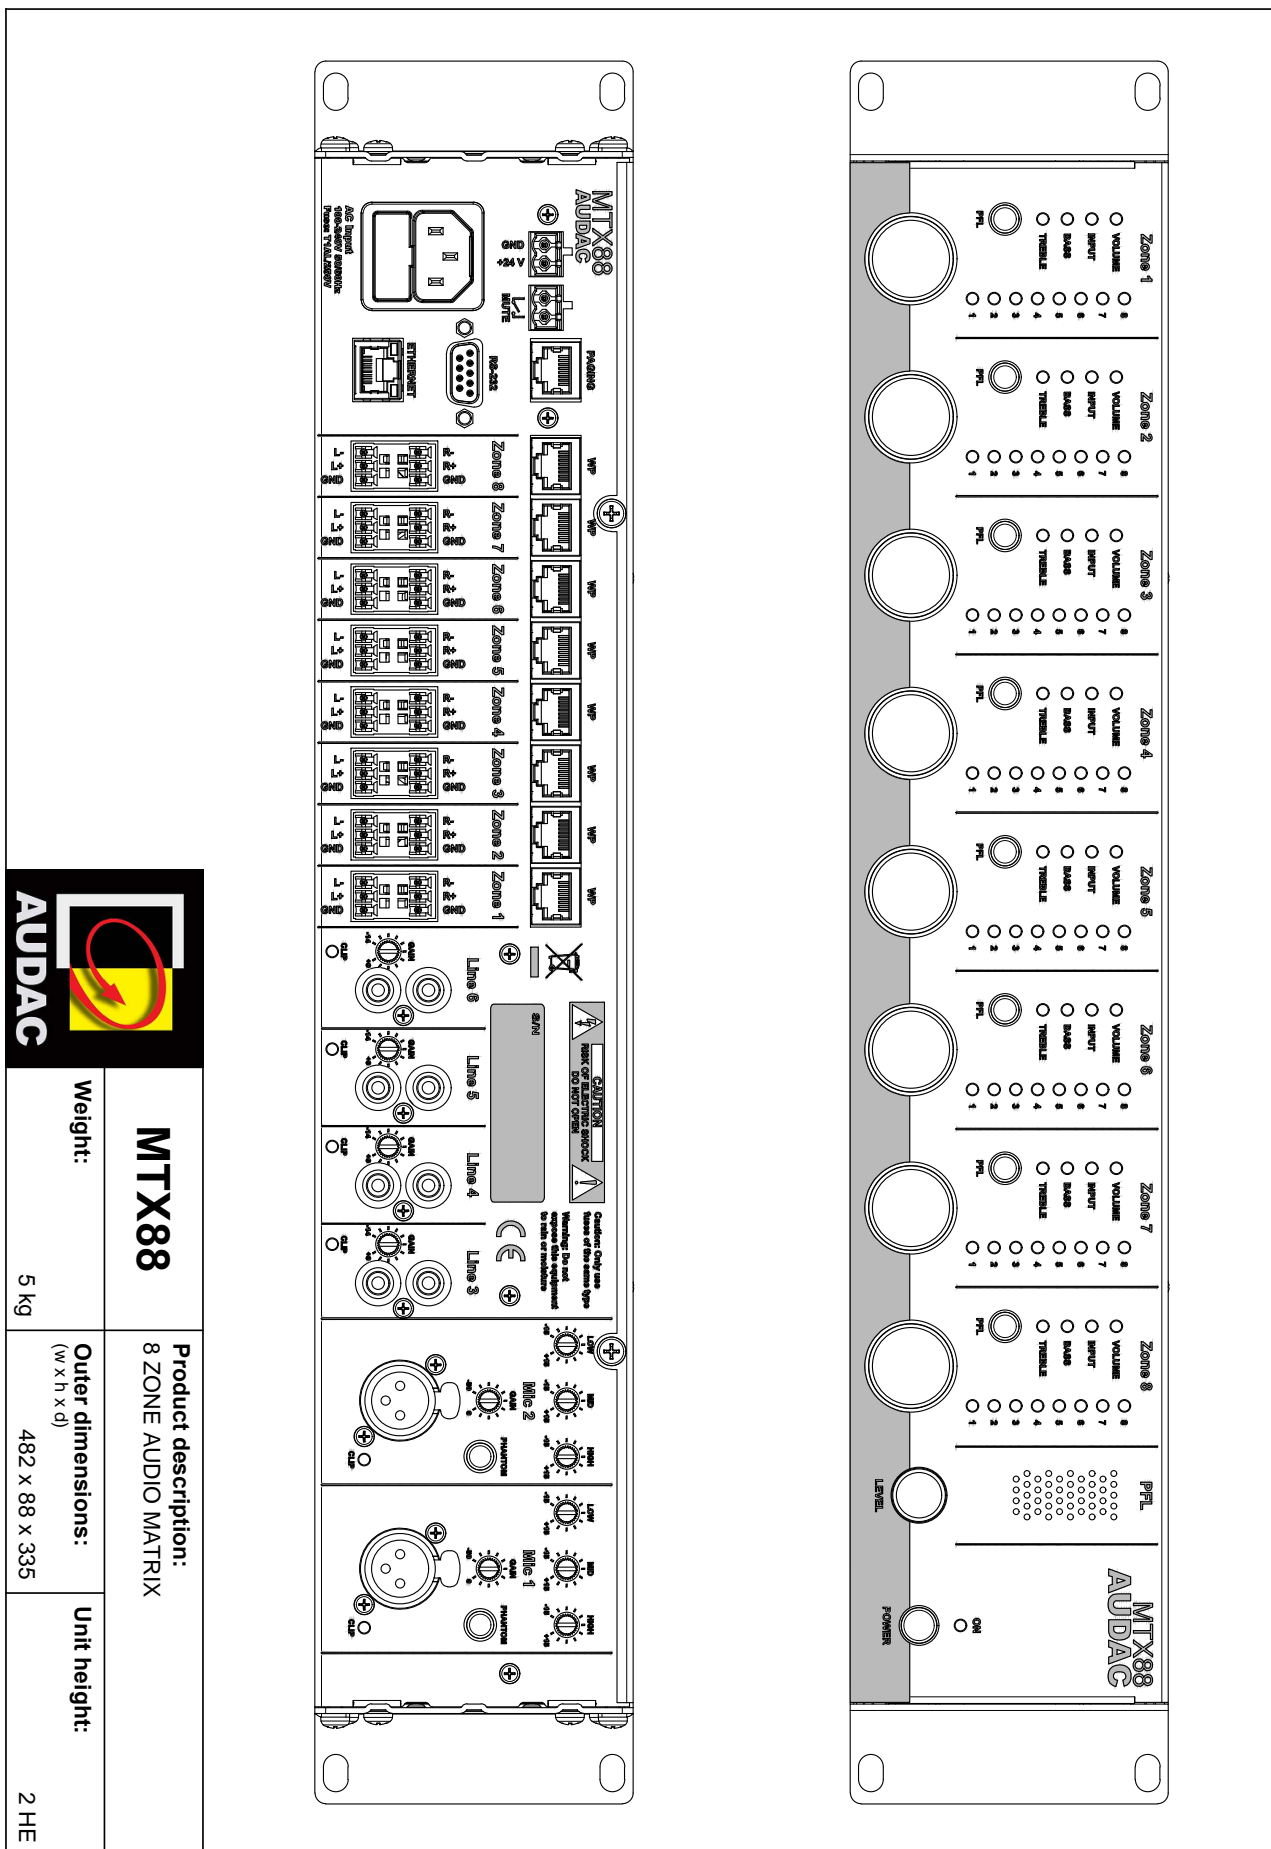

MTX88

Product description:
8 ZONE AUDIO MATRIX

Weight:

5 kg

Outer dimensions:

482 x 88 x 335 (w x h x d)

Unit height:

2 HE