



PMQ240

WaveDynamics™ quad-channel 100V power amplifier

Highlights:

- Lightweight class-D amplifier
- XLR input & linkthrough connections
- Terminal block output connections
- RS232 control
- Dante expansion port
- Advanced DSP and loudspeaker management
- 2.5" LCD display with intuitive user interface
- WaveDynamics™ speaker & set configurations



The PMQ series are professional 100V quad channel power amplifiers, providing a new standard for premium sound 100V amplification in public address applications. Their advanced features and availability in different output powers provide an enormous flexibility for numerous applications.

The PMQ240 is a four channel Class-D 100V power amplifier with an output power of 240 Watt for each channel. The WaveDynamics™ DSP processor combination with the 2.5" LCD display gives an unmatched user experience with intuitive functions overview for easy configuration.

Acoustics can be optimized using the filters selectable between Low / High & Band Pass and the 7-Band equalizer both with adjustable frequencies and Q-factor. Other provided functions are delay and dynamic bass boost. These settings can be custom configured using the front panel of the amplifier, whereby access can be given on two different levels (User & Administrator) using password or USB-key protection.

Configuration is made simple by the loudspeaker presets and full system configurations which can be selected from a library and uploaded with a USB flash drive. This ensures the best acoustical performance with a 'bullet-proof' loudspeaker protection.

A great input flexibility and source compatibility is offered by the input selection matrix and the XLR and terminal block signal connections. System integration is made easy using the RS-232 control port. Optional Dante™ interface is available for the WaveDynamics™ amplifiers. The installation of this network interface allows receiving and sending of low latency, high quality audio over a standard Ethernet network.

Applications:



- Bars, restaurants
- Retail
- Public facilities
- Corporate spaces
- Events
- Live performances

System specifications:

RMS Power		4 x 240 W
Frequency	Response (± 3 dB)	50 Hz - 20 kHz
Signal / Noise		> 95 dB
THD+N (@ 1 kHz)		< 0.05% (1/2 Rated Power)
Crosstalk (@ 1 kHz)		> 70 dB
Technology		Class-D
Power	Supply	Switching mode
	Operating	230 ~ 240 V AC / 50 ~ 60 Hz
Inputs	Sensitivity (1W/1m)	-30 dB ~ +5 dB
	Impedance	10 k Ω balanced
Common mode rejection ratio		70 dB
Damping factor		> 200
Protection	Amplifier	DC Short circuit
		Over heating
		Over load
		Signal limiting
	Access	User & Administrator level (Through password and USB-key protection)
Cooling		Temperature controlled FAN
Operating temperature		0° ~ 40° @ 95% Humidity
Inputs	Connector	XLR & 3-pin Euro Terminal Block (3.81 mm)
Outputs	Connector	4-pin Euro Terminal Block (Pitch - 5.08 mm)

Product Features:

Dimensions	482 x 88 x 420 mm (W x H x D)
Weight	8.05 kg
Unit height	2 HE
Construction	Steel
Colours	Black

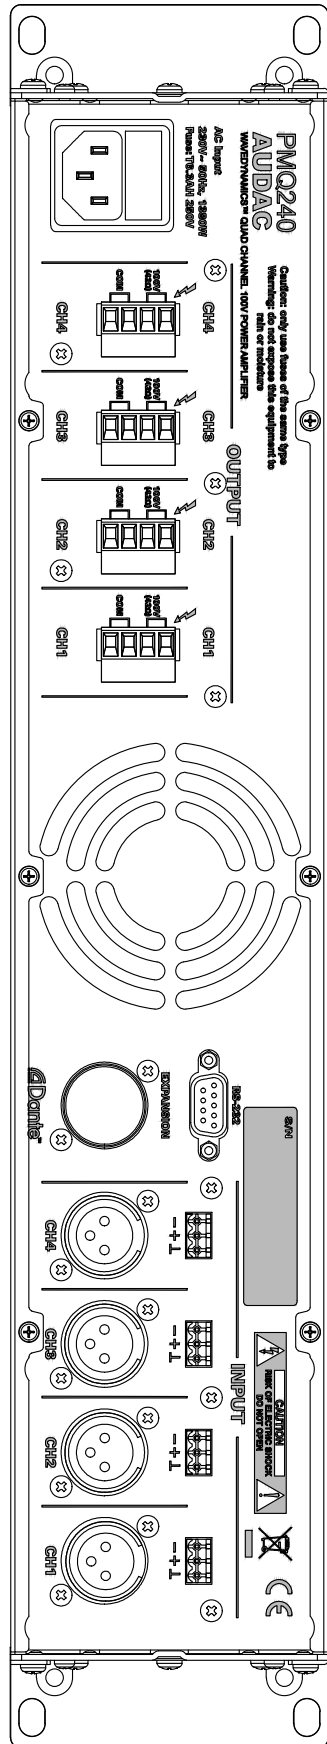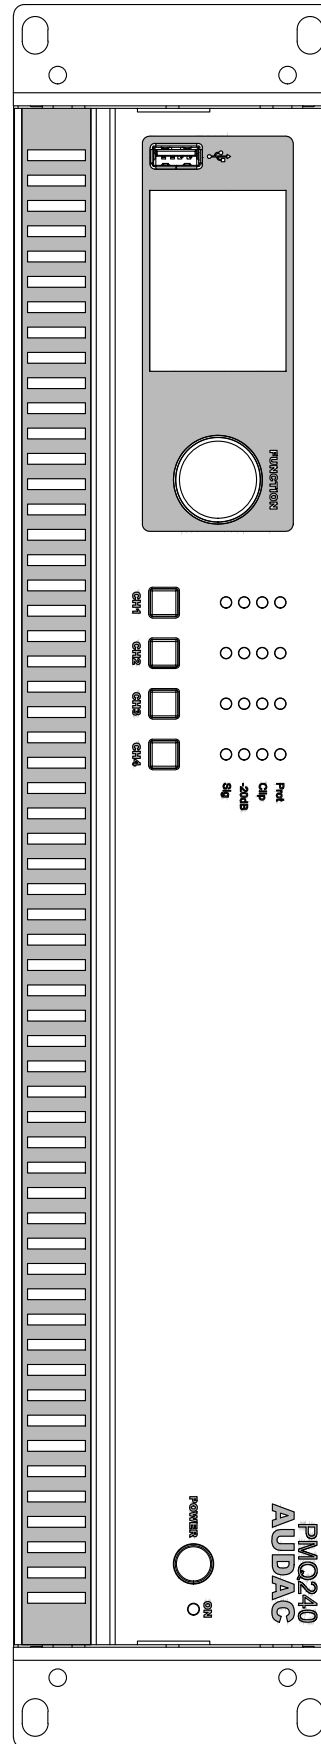

PMQ240	Product description: WAVEDYNAMICS™ QUAD CHANNEL 100V POWER AMPLIFIER - 4 X 240W
Weight: 8,22 kg	Outer dimensions: (w x h x d) 483 x 88,1 x 420
	Unit height: 2 HE