

Highlights:

- In depth adjustable
- Stores up to 9 units of 19" Equipment
- Punched square holes for use with snap-in cage nuts
- Loading capacity of 100 kg
- 2 mm thick cold rolled steel frame
- Easy assembly in 10 minutes
- Floor standing & wall mounted use
- Unrestricted air flow due to open-frame design
- Stand alone & in-furniture integration
- Ships as flat-down package

Product information:

The OPR309A is an in depth adjustable professional and solid constructed open frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards which is suitable for wall mounted or floor standing installation. It ensures maximum installation, connectivity and maintenance ease storing up to 9 units of 19" equipment.

The open frame rack has an adjustable depth of 300 to 450 mm for easy installation and fitment in existing furniture. The rugged construction made of 2 mm thick steel allows pre-loading of the equipment before transportation to the installation site. Finishing is done in a black (RAL9004) powder coating with fine structure while punched equipment mounting profiles on front and both sides offer a multifunctional use of the cabinet. Delivered in a flat-down package, the simple structure allows assembly by a single person in a record-breaking time.





Product Features:

Unit height		9 HE
Max. usable depth		300 ~ 450 mm
Max. load standing		100 kg
Max. load hanging		50 kg
Dimensions		520 x 425 x 300~450 mm (W x H x D) (excl. rubber feet)
Colours		Black (RAL9004)
Accessories	Included	4 x Levelling feet
		4 x M8 expanding wall bolt
		20 x Cage nuts + screws
	Optional	KM600 - M6 Cage nuts
Weight		8.5 kg

Variants:

- OPR309A/B - Black

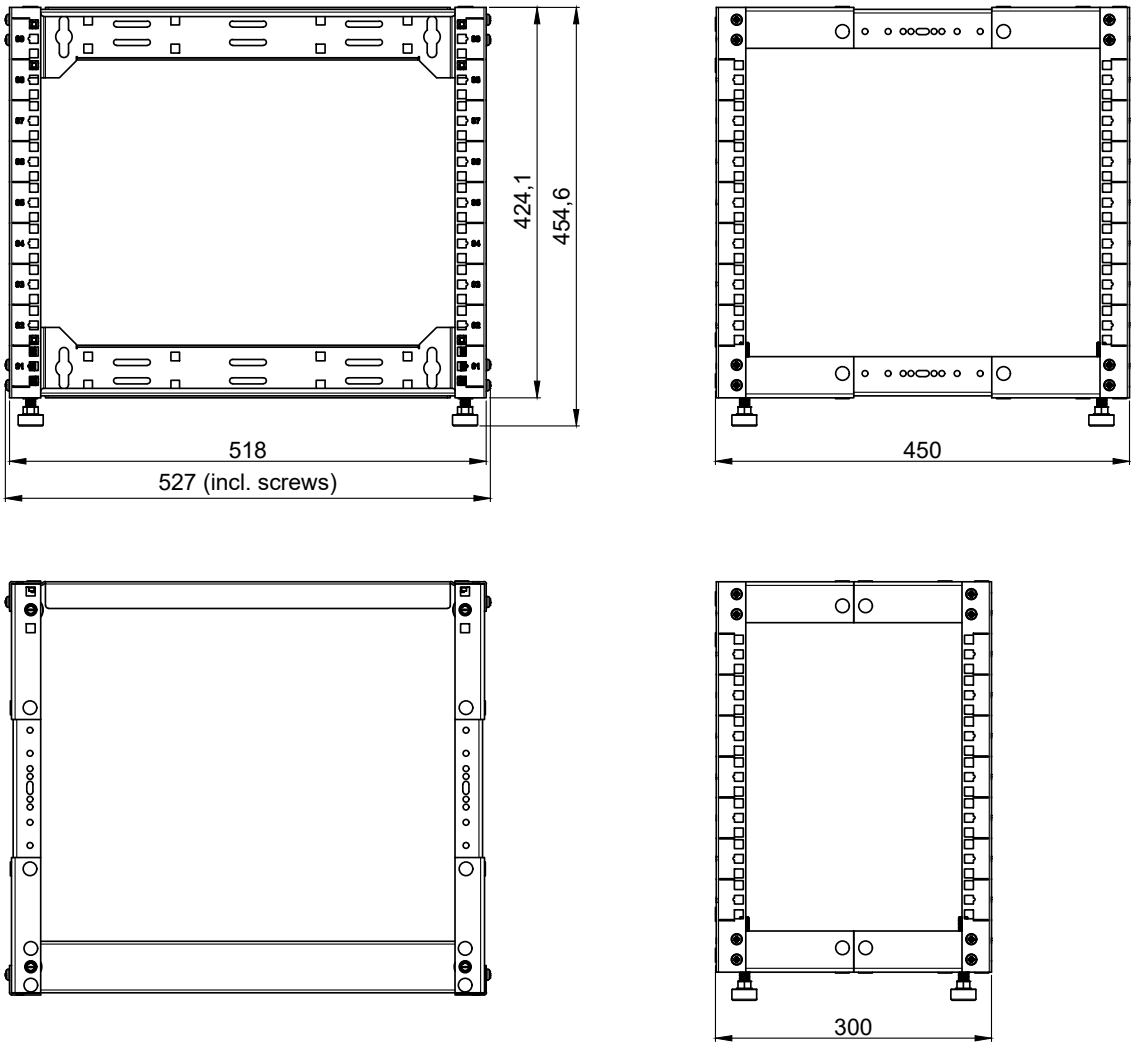

	OPR309A	Product description: 19" OPEN FRAME RACK - 9 UNIT - 300-450MM	
	Weight: TBA	Outer dimensions: (w x h x d) 527 x 454,6 x 450	Unit height: 9 HE