

Highlights:

- 19" Power distribution unit
- Dimmable rack lighting (LED) with ON/OFF switch
- Charging front USB front connection (2x)
- Male Schuko (CEE 7/7) input connection
- Black aluminum housing
- Chassis earth connection point
- 16A ~ 250 VAC / 4000 W Max
- 2.5 meter fixed connection cable
- 3 x 2.5 mm² cable diameter



Product information:

The PSR429 series includes a switchable LED rack light, two front USB jacks and a 16 Amps circuit breaker on the front panel of the unit. Power distribution for up to nine devices is made possible using the rear output sockets.

Product Features:


Dimensions	483 x 44.7 mm (W x H) (with mounting ears)
Cable length	2.5 m
Unit height	1 HE
Weight	1.87 kg
Power handling	250 V AC ~ 16 A / 4000 W
USB	2 x USB Type A connections 5V / 2.1 A supply (two ports combined)
LED Light	Switchable ON/OFF (switch) Dimmable between 25% and 100% Max. 70 lumen


Physical Characteristics:

Inner conductor	Section	3 x 2.5 mm ²
-----------------	---------	-------------------------

Variants:

- PSR429F/B - Black version

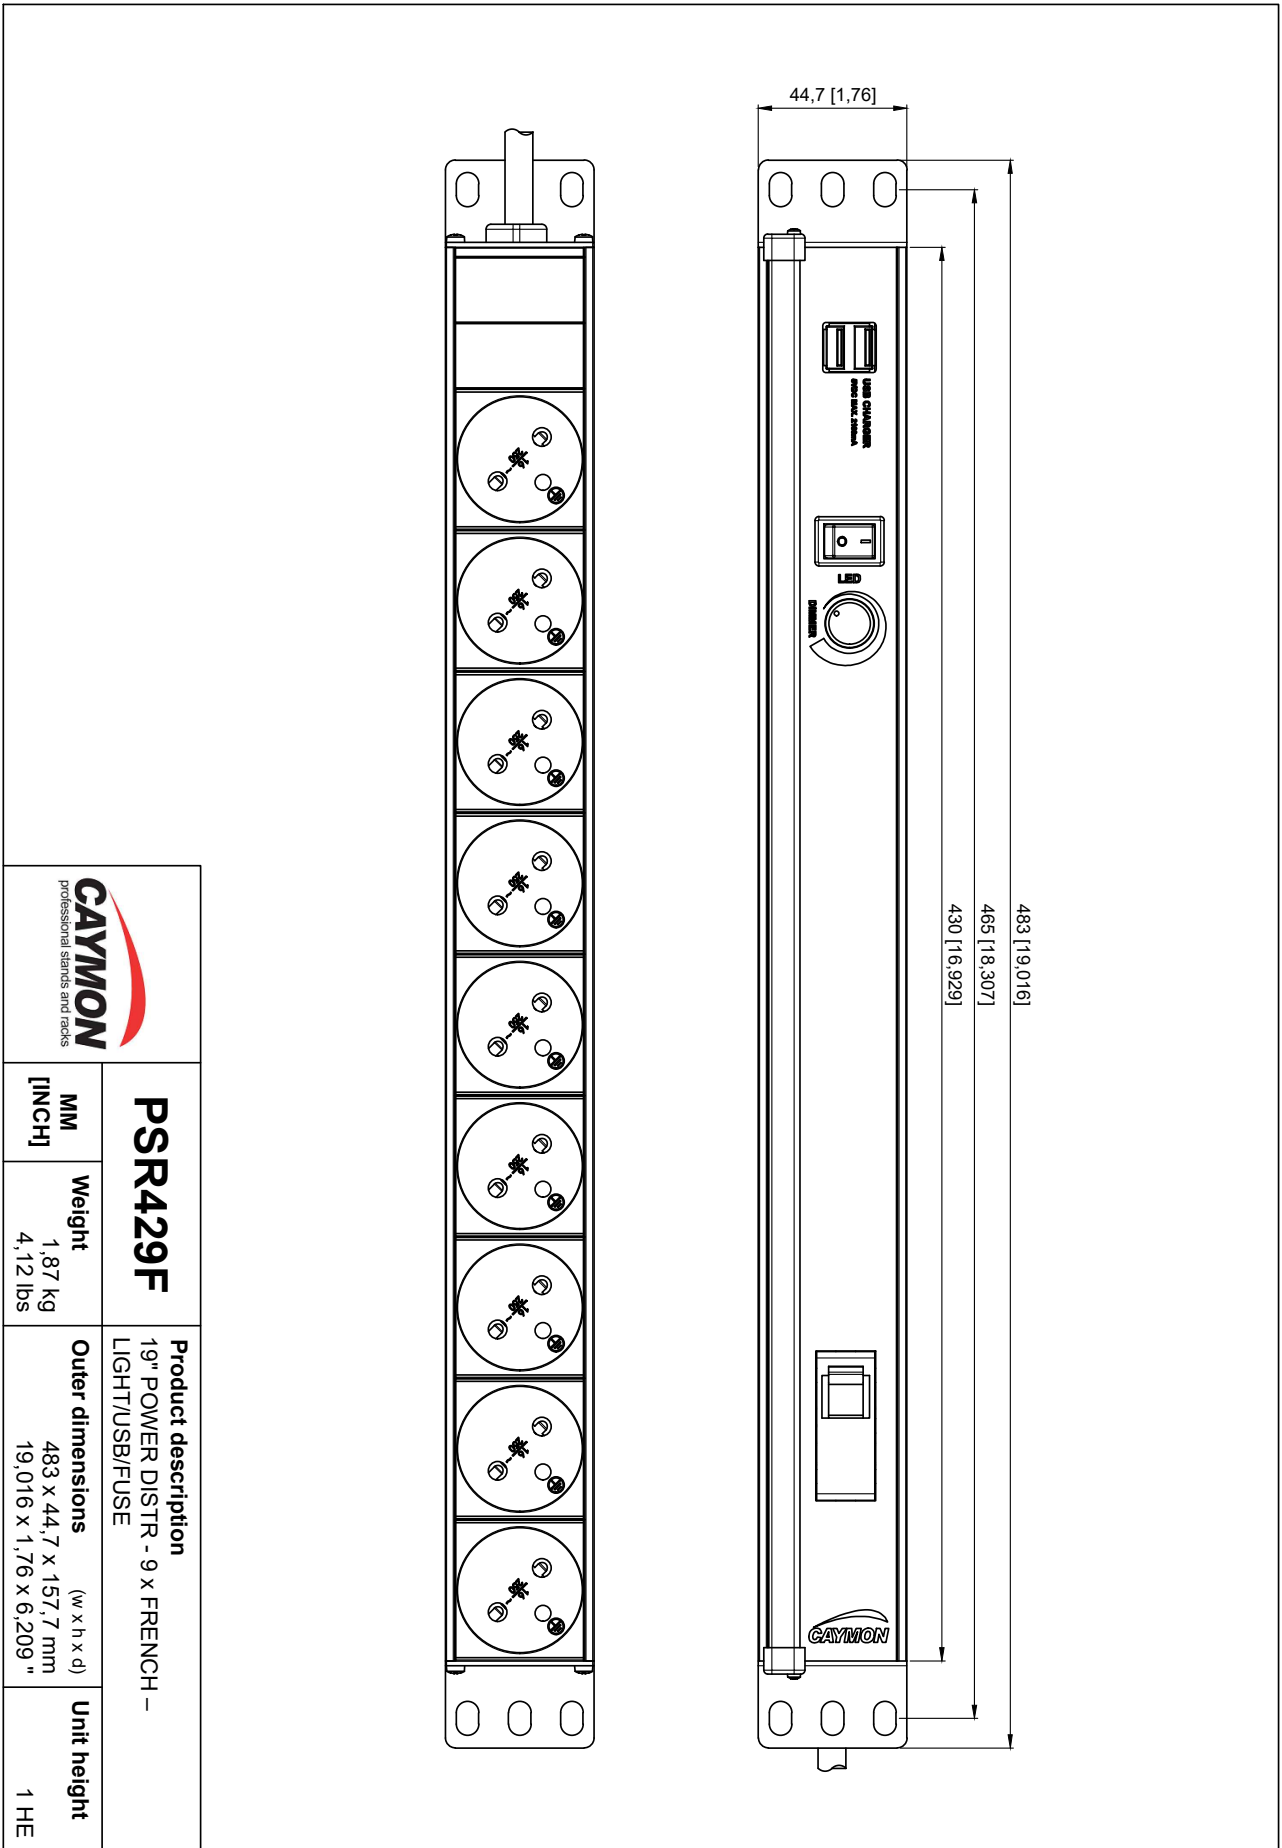

		PSR429F	Product description 19" POWER DISTR - 9 X FRENCH - LIGHT/USB/FUSE	Unit height 1 HE