

### Highlights:

- 19" Power distribution unit
- Male Schuko (CEE 7/7) input connection
- Black aluminum housing
- Chassis earth connection point
- 16A ~ 250 VAC / 4000 W Max
- 2.5 meter fixed connection cable
- Dimmable rack lighting (LED) with ON/OFF switch
- Charging front USB front connection (2x)



### Product information:

The PSR529 series includes a switchable LED rack light, two front USB jacks and a 16 Amps circuit breaker on the front panel of the unit. Power surge & spike protection is offered by the internal protector network, while a voltage and current indicator allow continuous voltage and power consumption monitoring. Power distribution for up to nine devices is made possible using the rear output sockets.


### Product Features:


|                  |  |
|------------------|--|
| Dimensions       | 483 x 44.7 mm (W x H) (with mounting ears)   |
| Cable length     | 2.5 m  |
| Unit height      | 1 HE   |
| Weight           | 1.92 kg  |
| Power handling   | 250 V AC ~ 16 A / 4000 W   |
| Surge protection | Maximum continuous working voltage (Ur): < 1000V<br>Nominal discharge current (8/20µS) In: 10 KA<br>Voltage protection level (Up): < 1000 V<br>Response time (tA): < 25 nS |
| USB              | Insulation resistance (Ris): > 100 MΩ<br>2 x USB Type A connections<br>5V / 2.1 A supply (two ports combined)  |
| LED Light        | Switchable ON/OFF (switch)<br>Dimmable between 25% and 100%<br>Max. 70 lumen   |

## Variants:

---

- PSR529F/B - Black version

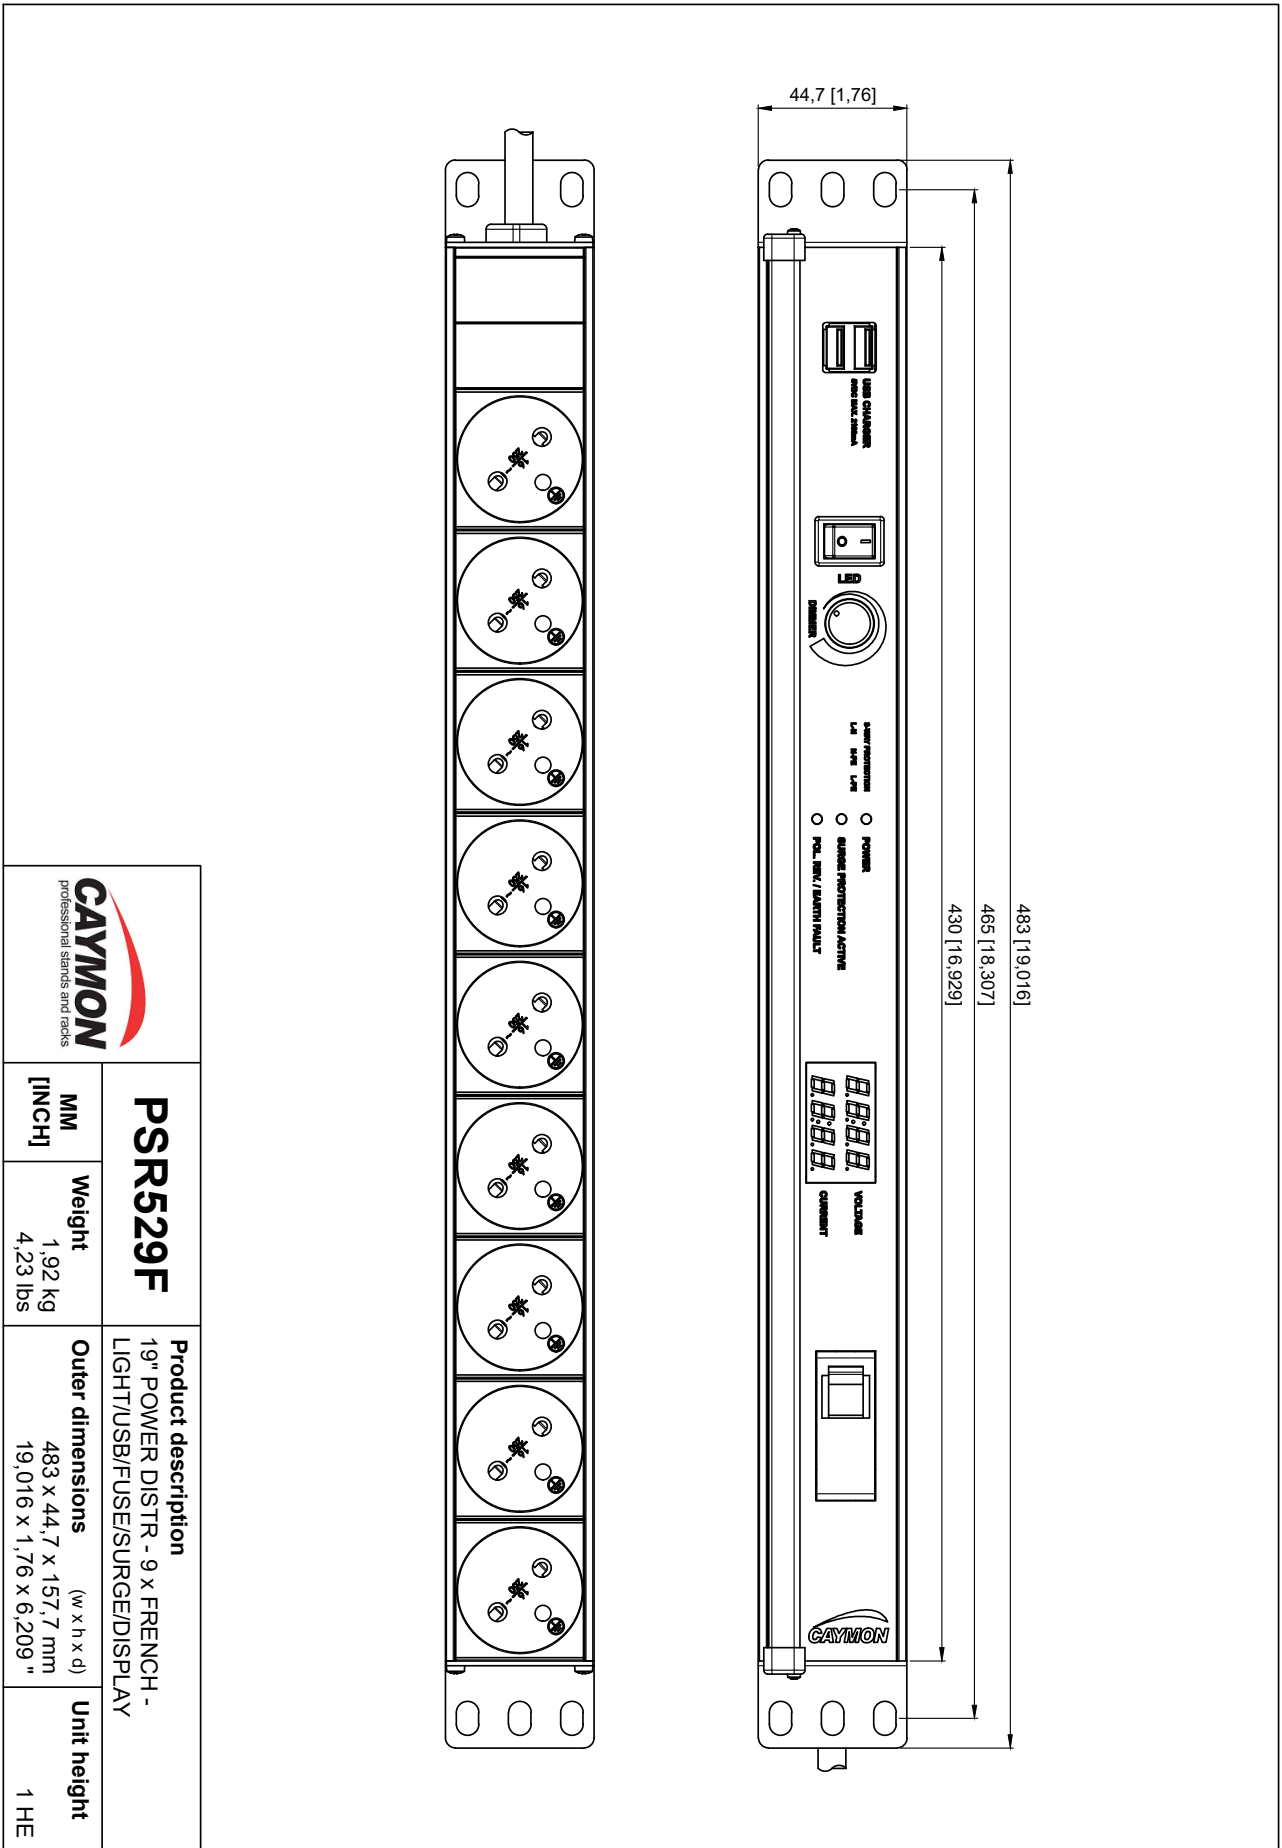

|   |  |                |  |   |  |
|---|--|----------------|--|---|--|
|  |  | <b>PSR529F</b> |  | <b>Product description</b><br>19" POWER DISTR - 9 X FRENCH - LIGHT/USB/FUSE/SURGE/DISPLAY |  |
|   |  |                |  |   |  |