

# CM1008

## 8" two-way loudspeaker



The Apart CM1008 two-way built-in low impedance loudspeaker can be used with a standard hi-fi or professional amplifier. It provides you with a powerful transparent and warm sound that covers the complete frequency band what makes this speaker suitable for the distribution of music at a higher volume level.

The housing of CM1008 is made of high quality ABS. It has a 1" tweeter and the 8" enforced woofer is made out of polypropylene, what makes it moisture-proof (IP54). The grille is made of aluminium what makes CM1008 suitable to be used in humid environments.

The loudspeaker is easy to install, due to its simple, quick mounting system with 3 screws. These screws are hidden behind the loudspeaker grill, what gives the loudspeaker a modern and striking design.

This loudspeaker is now updated with a new Quick Fix connector and transformer tapping sticker for an even faster and easier installation.

Versatile for almost every market around the globe due to the addition of the 70 / 100 volt connection, the CM series is bound to stay the standard installer's choice in the fixed install market.

The complete redesign of the CM Series is done according to the corporate Apart identity. Apart blue speaker clamps and product sticker, an Apart marked transformer and loudspeaker basket.

From 12 pieces on, the CM1008 loudspeakers can be painted optionally in any other RAL color (Ref. PAINT-CM).


## TECHNICAL SPECIFICATIONS

outside diameter in mm	244	depth in mm	90
cutout in mm	223	loudspeaker system	2-way
woofer size in inch	8	woofer cone material	polypropylene
tweeter size	1 inch	mounting system	3 screws
colour	white	impedance in ohms	8
low impedance dynamic power in watts	100	SPL 1W/1m in dB	90
max SPL 1m in dB	107	frequency response in Hz	50 - 20K
main construction material	ABS plastic	grille main material	aluminium
IP rating	54	applicable low impedance	Yes
applicable in 100V	No	Vertical dispersion angle 1000 Hz	180°
Net weight product (kg)	1,10		

MORE PICTURES




ACCESSORIES

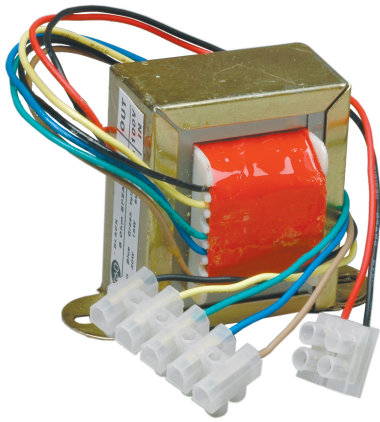

**T60**

8 ohms / 100 volt transformer, 60 watts

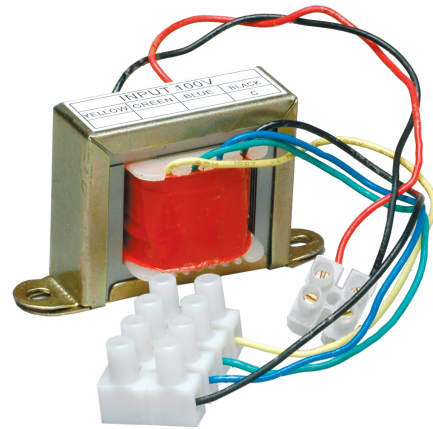

**T20**

8 ohms / 100 volt transformer, 20 watts