



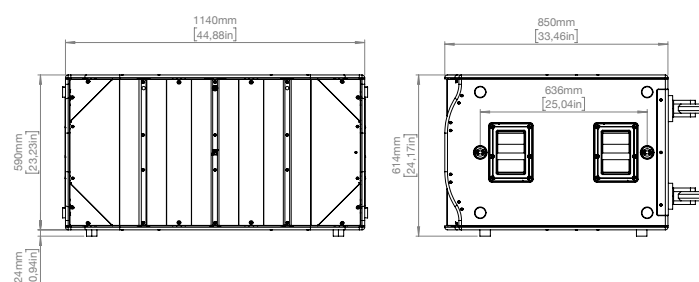

Description

The Thunder-KS5PI is a passive subwoofer featuring 2x long excursion 21" neodymium magnet woofer, requiring two amplifier channels to be driven.

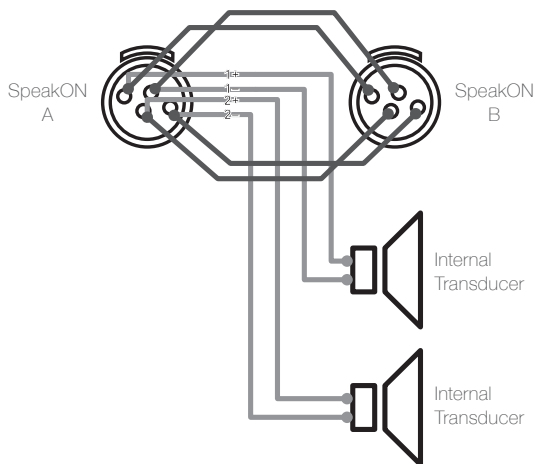

Technical Specifications

Type	Passive subwoofer
Transducers	2x21" neodymium magnet woofer
Frequency Response ¹	30 Hz – 150/300 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 300 Hz, preset dependant
Max SPL ²	145 dB peak
Nominal Impedance	2x 4Ω
Power handling	2x 2800 W peak
Coverage	Omni
Connectors	Speaker input/parallel output 2x SpeakON NL4 Input terminals: IN 1+/1- (woofer 1), Link 2+/2- (woofer 2)

Handling & Finishes

IP Rating	IP54
Dimensions (WxHxD)	1140 x 590 x 850 mm (44.9 x 23.2 x 33.5 in)
Weight	97,4 kg (214.7 lb)

¹ Extensible with dedicated preset according to the midrange crossover point.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m.

Notes:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers. New materials and designs are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this document.