

VINCI4-16-BL

4" two-way 16 Ohms hi-fi
loudspeaker, black



Apert VINCI Series has been expanded with a new VINCI4-16 bass reflex cabinet loudspeaker. VINCI4-16 has an impedance of 16 ohms, what allows the connection of up to 4 VINCI4-16 loudspeakers in parallel on a single amplifier channel, capable of handling a 4 ohm load.

The VINCI4-16 is a small yet true high-end speaker specifically designed for fixed install applications. VINCI4-16 loudspeakers are highly recommended for use in small to medium-sized projects where design and sound quality really matter. VINCI series loudspeakers are ideal for use in retail stores, high class restaurants, boardrooms or any other application where stylish design and a HiFi sound experience are expected.

The loudspeaker has a 4" coated paper cone woofer and a 3/4" silk dome tweeter. VINCI4-16 is compact, audiophile, neutral but also captivating... with great dynamics and a crystal clear stereo image. VINCI4-16 is available in glossy black (VINCI4-16-BL) and white (VINCI4-16-W). The magnetic cloth grille can easily be removed accentuating the quality loudspeaker components.

VINCI4-16 loudspeakers can be shelf mounted or, by using the optional VINCI5BRA wall mount bracket, on wall mounted.

TECHNICAL SPECIFICATIONS

height in mm	210	width in mm	136
depth in mm	164	loudspeaker system	2-way
woofer size in inch	4	woofer cone material	paper
tweeter size in inch	0,75	mounting system	accessory
colour	white / black	impedance in ohms	16
low impedance dynamic power in watts	120	SPL 1W/1m in dB	84
max SPL 1m in dB	104	frequency response in Hz	70 - 25K
main construction material	mdf wood	grille main material	cloth
IP rating	20	applicable low impedance	Yes
applicable in 100V	No		

MORE PICTURES




ACCESSORIES




VINC15BRA-BL

Bracket for VINCI4-BL & VINCI5-BL

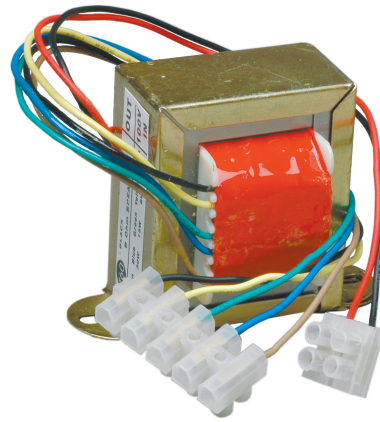

T60

8 ohms / 100 volt transformer, 60 watts

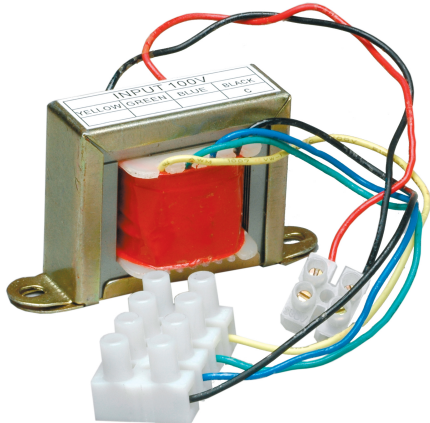

T20

8 ohms / 100 volt transformer, 20 watts